


UL exit sign with side emergency light combo

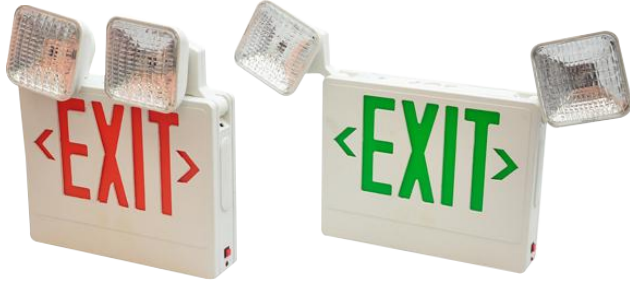

- Certificate: UL listed
- Standard: UL 924, OSHA
- Material: ABS housing, acrylic panel
- Feature: Adjustable emergency lights, removeable directional arrow
- Temperature: -10°C to 50°C
- Mounting: Wall, side, or ceiling

Available size

Color	Configuration	Pictograms	Light source	Power	Dual voltage	Backup battery	Ref. No.
Green	Single face	EXIT + arrow	LED + halogen lamp	8W	AC 120V / 277V	≥ 90 min	C7501
Green	Double face	EXIT + arrow	LED + halogen lamp	8W	AC 120V / 277V	≥ 90 min	C7502
Red	Single face	EXIT + arrow	LED + halogen lamp	8W	AC 120V / 277V	≥ 90 min	C7503
Red	Double face	EXIT + arrow	LED + halogen lamp	8W	AC 120V / 277V	≥ 90 min	C7504