


Field adjustable pressure reducing valve (WP300)

Field adjustable pressure reducing valve is field adjustable automatic pressure regulating valve used to reduce downstream water pressure under both flowing and static conditions. For WP300 type, inlet pressure is max 390 psi.



- Certificate: UL Listed
- Standard: ANSI / UL 1468
- Feature: Standpipe valve, floor control valve
- W. pressure: 300 psi
- Surface: Rough / polished / chrome plated

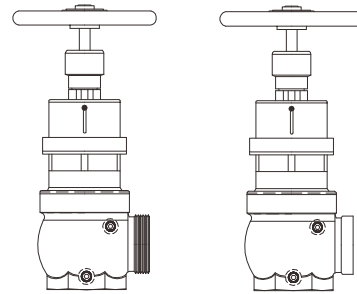

Main parts and material

| | | | |
|------------------------------------|--|---------------------------|--|
| Body | Forged brass, 1/4" NPT side taps available | Bonnet | Cast brass, visual indicator for Open / Closed |
| Tamper-resistant protection | Tamper-resistant cover with screw | Supervisory switch | Built-in (Optional) |

Available size

| Size | Pattern | Inlet | Outlet | Max inlet pressure (psi) | Ref. No. |
|--------|---------|---------------|---------------|--------------------------|----------|
| 1-1/2" | Angle | 1-1/2" NPT, F | 1-1/2" NH, F | 375 | F3501 |
| 1-1/2" | Angle | 1-1/2" NPT, F | 1-1/2" NPT, F | 375 | F3502 |
| 1-1/2" | Angle | 1-1/2" GRV | 1-1/2" GRV | 375 | F3503 |
| 2-1/2" | Angle | 2-1/2" NPT, F | 2-1/2" NH, F | 390 | F3504 |
| 2-1/2" | Angle | 2-1/2" NPT, F | 2-1/2" NPT, F | 390 | F3505 |
| 2-1/2" | Globe | 2-1/2" GRV | 2-1/2" GRV | 390 | F3506 |