


## Right-angle type wet landing valve

Wet landing valve is normally located at discharge points of a tall building where the supply of water is via wet riser. And layflat hose is coupled into the landing valve to provide water to the location of the fire.



- Certificate: BSI / LPCB Approved
- Standard: BS 5041-1, BS 5154 globe type
- Connection: Flanged to EN 1092-3, or screwed to ISO 7-1
- Temperature: 0°C to 38°C
- Test: Body 22.5 bar / seat 16.5 bar
- Surface: Red powder coating (RAL 3000)

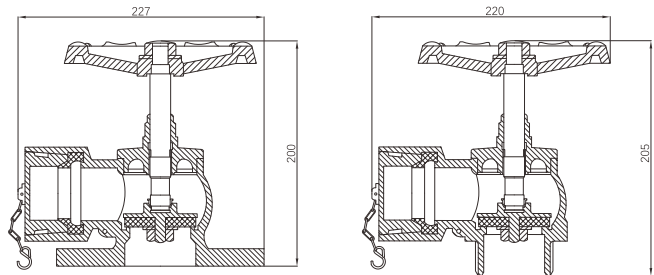

### Main parts and material

DN 65 size

<b>Body / bonnet / disk</b>	Copper alloy, LG2 or CZ122	<b>Handwheel</b>	Grey cast iron to BS 1452
<b>Blank cap</b>	Copper alloy to EN 1982, with chain	<b>Strap</b>	Artificial leather, with non-ferrous padlock

### Available size

Size	Type	Inlet	Outlet	Working pressure (bar)	Ref. No.
DN 50	Right-angle	Flanged DN 50, PN 16	2.5" BS336	15	FE1201
DN 65	Right-angle	Flanged DN 65, PN 16	2.5" BS336	15	FE1202
DN 65	Right-angle	2.5" BSPT, M	2.5" BS336	15	FE1203

**Note:** Please refer to LPCB certificate (Cert No 1153Le) as our TPMC brand, with model F25-50, F25-65, F26-65T.