



Threaded butterfly valve (Gear actuator & tamper switch)

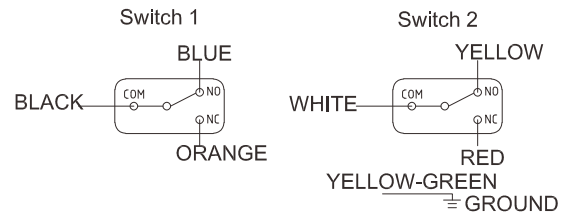

- Certificate: UL Listed / FM Approved
- Standard: EN 593 / BS 5155
- Connection: Threaded as ISO 7-1
- Contact rating: 16A at 125/250VAC; 0.5A at 250VDC; 10A at 36VDC
- Temperature: 0°C to 80°C
- W. pressure: PN 10
- Surface: FBE coating as AWWA C550



Main parts and material

Body	Ductile iron as EN 1563, EN-GJS-450-10	Disc	Carbon steel with EPDM
Top indicator	ISO 5211, yellow flag type indicator	Signal gearbox	Carbon steel

Available size

Size			Dimension (mm)				Working pressure	Ref. No.
Inch	DN	mm	A	B	H	L		
1"	25	33.7	125	41	115	54	PN 10	V1901
1-1/4"	32	42.4	125	49	118	67	PN 10	V1902
1-1/2"	40	48.3	125	56	121	73	PN 10	V1903
2"	50	60.3	125	71	131	83	PN 10	V1904