


## Grooved double door check valve



- Certificate: CE
- Standard: EN 1074-3
- Connection: Grooved as ISO 6182
- Temperature: 0°C to 80°C
- W. pressure: PN 16
- Surface: FBE coating as AWWA C550

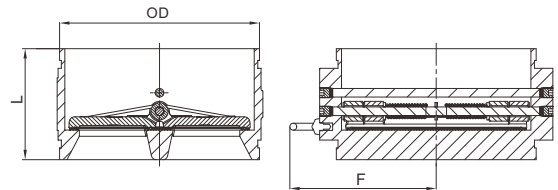

CE

### Main parts and material

<b>Body</b>	Ductile iron as EN 1563, EN-GJS-450-10	<b>Disc</b>	SS304 with EPDM
<b>Shaft</b>	SS420 / SS304 / SS316	<b>Spring</b>	SS304

### Available size

Size			Dimension (mm)		Working pressure	Ref. No.
Inch	DN	mm	L	F		
8"	200	219.1	160	165	PN 16	V2401
10"	250	273.0	180	203	PN 16	V2402
12"	300	323.9	180	228	PN 16	V2403