



Flanged Y type strainer

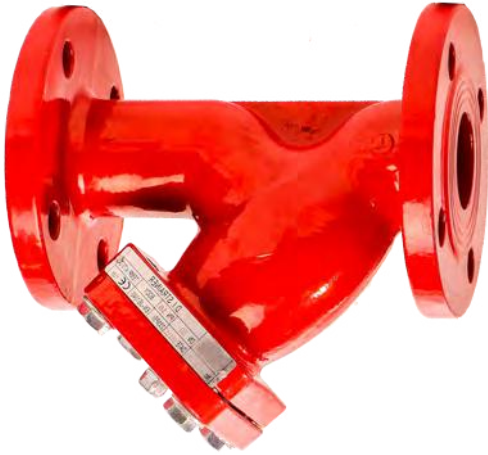

- Certificate: UL Listed
- Standard: UL Subject 321
- Connection: Flanged as EN 1092-2
- Temperature: 0°C to 80°C
- W. pressure: PN 16
- Surface: FBE coating as AWWA C550

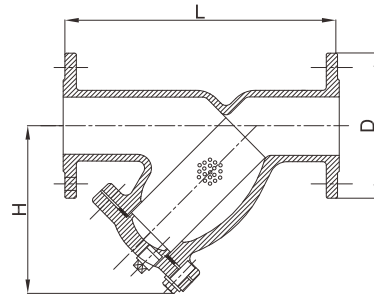

Main parts and material

Body / cover	Ductile iron as EN 1563, EN-GJS-450-10	Screen	SS304, SS316, or Monel, with 1/8" to 1/4" hole diameter, as 3-7 mesh
Cover gasket	EPDM	Plug	Malleable iron

Available size

Size			Dimension (mm)		Working pressure	Ref. No.
Inch	DN	mm	L	H		
2"	50	60.3	230	140	PN 16	V2601 (UL)
2-1/2"	65	76.1	290	175	PN 16	V2602 (UL)
3"	80	88.9	310	198	PN 16	V2603 (UL)
4"	100	114.3	350	229	PN 16	V2604 (UL)
5"	125	139.7	400	287	PN 16	V2605 (UL)
6"	150	165.1	480	304	PN 16	V2606 (UL)
8"	200	219.1	600	371	PN 16	V2607 (UL)
10"	250	273.0	730	469	PN 16	V2608 (UL)
12"	300	323.9	850	540	PN 16	V2609 (UL)
18"	450	457	1200	862	PN 16	V2610 (ISO)
20"	500	508	1250	926	PN 16	V2611 (ISO)
24"	600	610	1450	1057	PN 16	V2612 (ISO)

Note: When Monel material for screen is selected, the strainer is ISO certified, not UL listed.