


Grooved NRS gate valve with wrench nut



- Certificate: UL Listed / FM Approved
- Standard: UL 262 / AWWA C515, C509
- Connection: Grooved as AWWA C606
- Temperature: 0°C to 80°C
- W. pressure: 300 psi
- Surface: FBE coating as AWWA C550

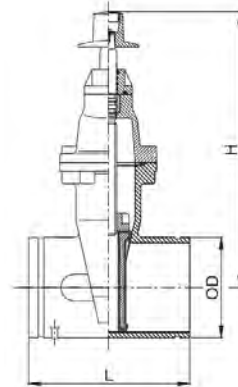

Main parts and material

Body / bonnet	Ductile iron as ASTM A536, 65-45-12	Resilient wedge disc	Ductile iron with EPDM
Stem	ASTM A276 Type 304	Wrench nut (2")	Ductile iron, and match operating key

Available size

Size			Dimension (mm)		Working pressure (psi)	Ref. No.
Inch	DN	mm	L	H		
2"	50	60.3	178	265	300	V3801 (FM)
2-1/2"	65	73.0 / 76.1	190	273	300	V3802 (UL/FM)
3"	80	88.9	203	300	300	V3803 (UL/FM)
4"	100	114.3	229	350	300	V3804 (UL/FM)
5"	125	141.3 / 139.7	254	412	300	V3805 (UL/FM)
6"	150	168.3 / 165.1	267	465	300	V3806 (UL/FM)
8"	200	219.1	292	559	300	V3807 (UL/FM)
10"	250	273.0	330	635	300	V3808 (UL/FM)
12"	300	323.8	356	724	300	V3809 (UL/FM)