

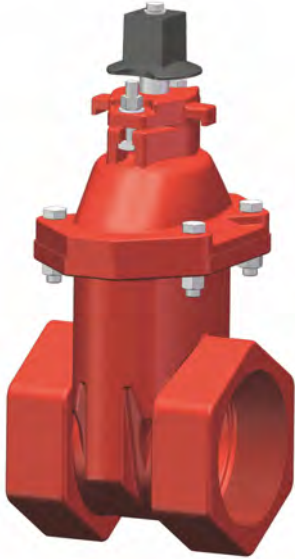


## Threaded NRS gate valve with wrench nut (Or with handwheel)



- Certificate: UL Listed / FM Approved
- Standard: UL 262 / AWWA C515, C509
- Connection: NPT as ASME B1.20.1
- Temperature: -10°C to 120°C
- W. pressure: 300 psi
- Surface: FBE coating as AWWA C550

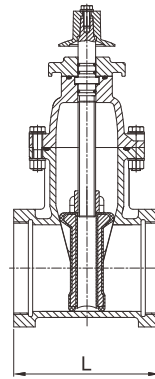

### Main parts and material

<b>Body / bonnet</b>	Ductile iron as ASTM A536, 65-45-12	<b>Resilient wedge disc</b>	Ductile iron with EPDM
<b>Stem</b>	ASTM A276 Type 304	<b>Wrench nut (2")</b>	Ductile iron, and match operating key

### Available size

Size			Dimension (mm)		Top connection	Working pressure (psi)	Ref. No.
Inch	DN	mm	L	H			
2"	50	60.3	178	240	Wrench nut	300	V3901 (FM)
2"	50	60.3	178	240	Handwheel	300	V3902 (FM)
2-1/2"	65	73.0 / 76.1	190	255	Wrench nut	300	V3903 (UL/FM)
2-1/2"	65	73.0 / 76.1	190	255	Handwheel	300	V3904 (UL/FM)
3"	80	88.9	203	280	Wrench nut	300	V3905 (UL/FM)
3"	80	88.9	203	280	Handwheel	300	V3906 (UL/FM)