

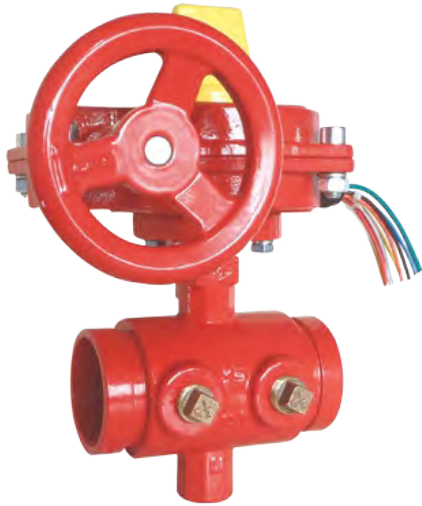


Grooved butterfly valve (Gear actuator & tamper switch & tapped body)

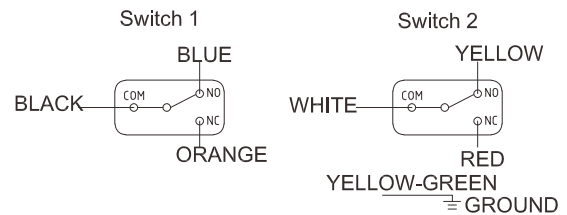

- Certificate: UL Listed / FM Approved
- Standard: UL 1091 / MSS SP-67
- Connection: Grooved as AWWA C606
- Contact rating: 16A at 125/250VAC; 0.5A at 250VDC; 10A at 36VDC
- Temperature: 0°C to 80°C
- W. pressure: 300 / 363 psi
- Surface: FBE coating as AWWA C550

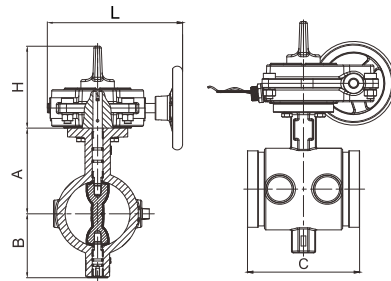

Main parts and material

Body / signal gearbox	Ductile iron as ASTM A536, 65-45-12	Disc	Ductile iron with EPDM
Top indicator	ISO 5211, yellow flag type indicator	Plug	Bronze as ASTM B584

Available size

Size			Dimension (mm)					Working pressure (psi)	Ref. No.
Inch	DN	mm	A	B	H	L	C		
2"	50	60.3	89	65	123	202	140	300 / 363	V4801 (UL/FM)
2-1/2"	65	73.0 / 76.1	102	71	123	202	153	300 / 363	V4802 (UL/FM)
3"	80	88.9	109	81	123	202	160	300 / 363	V4803 (UL/FM)
4"	100	114.3	128	95	123	202	168	300 / 363	V4804 (UL/FM)
5"	125	141.3 / 139.7	141	111	123	202	170	300 / 363	V4805 (FM)
6"	150	168.3 / 165.1	153	133	123	215	175	300 / 363	V4806 (UL/FM)
8"	200	219.1	184	165	123	274	201	300 / 363	V4807 (UL)
10"	250	273.0	216	196	123	274	220	300 / 363	V4808 (UL)
12"	300	323.8	254	226	132	294	235	300 / 363	V4809 (UL)