


Steel EMT conduit

Steel EMT (electrical metallic tubing) conduit is rigid, thin-walled, unthreaded ERW tube used as a metal raceway for protecting and routing of electrical wiring. Both the outside and inside surfaces are galvanized for corrosion resistance.



- Certificate: UL Listed
- Standard: UL 797 / ANSI C80.3
- Material: Carbon steel strip
- Surface: Hot dip galvanized

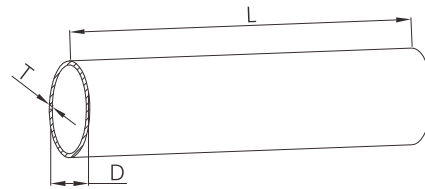

Available size

Trade size	Metric designator	OD	Thickness	Length	Ref. No.
		D (mm)	T (mm)	L (m)	
1/2"	16	17.93	1.07	3.05 (10 ft)	C1101
3/4"	21	23.42	1.24	3.05 (10 ft)	C1102
1"	27	29.54	1.45	3.05 (10 ft)	C1103
1-1/4"	35	38.35	1.65	3.05 (10 ft)	C1104
1-1/2"	41	44.20	1.65	3.05 (10 ft)	C1105
2"	53	55.80	1.65	3.05 (10 ft)	C1106
2-1/2"	63	73.03	1.83	3.05 (10 ft)	C1107
3"	78	88.90	1.83	3.05 (10 ft)	C1108
4"	103	114.30	2.11	3.05 (10 ft)	C1109

Note:

1. OD tolerance: OD 1/2" ~ 2" is $\pm 0.13\text{mm}$ (0.005"); OD 2-1/2" is $\pm 0.25\text{mm}$ (0.010"); OD 3" is $\pm 0.38\text{mm}$ (0.015"); OD 4" is $\pm 0.50\text{mm}$ (0.020").
2. Length tolerance: 3050mm (10 ft) $\pm 6.35\text{mm}$ (1/4").