


Exposed fire department outlet connection (FDC)

Fire department outlet connection (Wall hydrant) is used as an auxiliary connection to obtain water from its outlet. For exposed FDC, the body and outlet are found on buildings' outside wall for easy access by firefighter.



- Certificate: ISO
- Standard: NFPA 14
- Feature: Exposed type outlet
- W. pressure: 175 psi
- Surface: Rough / polished / chrome plated

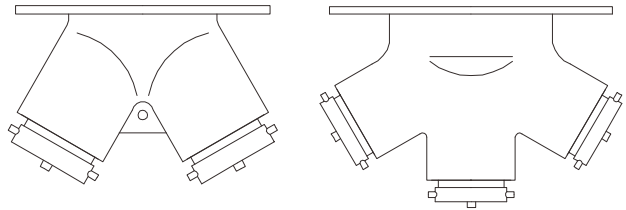

Main parts and material

Body	Cast brass, hose thread outlet	/	/
Cap	Brass, pin lug, with chain	Wall plate	Brass, special lettering for identification

Available size

Size	Way of outlet	Body pattern	Inlet	Outlet	Working pressure (psi)	Ref. No.
4" x 2-1/2"	2-way	Straight	4" NPT, F	(2) 2-1/2" NH, M	175	F0701
6" x 2-1/2"	2-way	Straight	6" NPT, F	(2) 2-1/2" NH, M	175	F0702
6" x 2-1/2"	3-way	Straight	6" NPT, F	(3) 2-1/2" NH, M	175	F0703