


Butt weld cap



- Certificate: ISO
- Standard: ASME B16.9
- Material: Carbon steel ASTM A234, WPB
SS ASTM A403, WP304 / WP316L
- W. pressure: Equal to same seamless pipe
- Surface: Black painting / hot dip galvanized
Pickling white, etc.

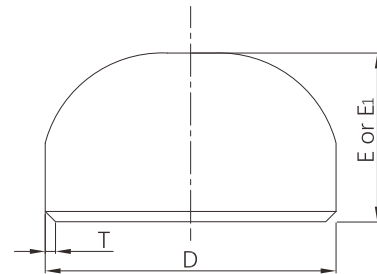

Available size

Size			Thickness (mm)			E (mm) within max T		E1 (mm) for greater T	Ref. No.
NPS	DN	OD (mm)	Sch10	Sch40	Sch80	E	Max T		
1/2"	15	21.3	2.11	2.77	3.73	25	4.57	25	N1201
3/4"	20	26.7	2.11	2.87	3.91	25	3.81	25	N1202
1"	25	33.4	2.77	3.38	4.55	38	4.57	38	N1203
1-1/4"	32	42.2	2.77	3.56	4.85	38	4.83	38	N1204
1-1/2"	40	48.3	2.77	3.68	5.08	38	5.08	38	N1205
2"	50	60.3	2.77	3.91	5.54	38	5.59	44	N1206
2-1/2"	65	73.0	3.05	5.16	7.01	38	7.11	51	N1207
3"	80	88.9	3.05	5.49	7.62	51	7.62	64	N1208
4"	100	114.3	3.05	6.02	8.56	64	8.64	76	N1209
5"	125	141.3	3.40	6.55	9.53	76	9.65	89	N1210
6"	150	168.3	3.40	7.11	10.97	89	10.92	102	N1211
8"	200	219.1	3.76	8.18	12.70	102	12.70	127	N1212
10"	250	273.0	4.19	9.27	15.09	127	12.70	152	N1213
12"	300	323.8	4.57	10.31	17.48	152	12.70	178	N1214
14"	350	355.6	6.35	11.13	19.05	165	12.70	191	N1215
16"	400	406.4	6.35	12.70	21.44	178	12.70	203	N1216
18"	450	457	6.35	14.27	23.83	203	12.70	229	N1217
20"	500	508	6.35	15.09	26.19	229	12.70	254	N1218
24"	600	610	6.35	17.48	30.96	267	12.70	305	N1219

Note: The thickness is available with Sch5, Sch10, Sch30, Sch40, Sch80, Sch120, Sch160, STD, XS, XXS, 5S, 10S, 40S, 80S, etc.