


Universal structural attachment



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to concrete structure

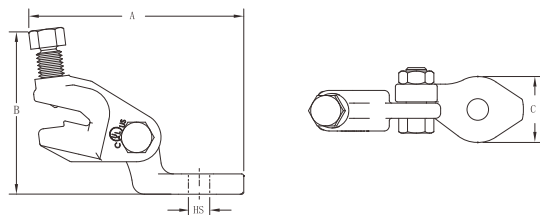

Available size


Sprinkler pipe to be braced		Hole size HS (mm)	Dimension (mm)			Ref. No.
NPS	DN		A	B	C	
1" ~ 10"	25 ~ 250	14	133	102	41	P6101
1" ~ 10"	25 ~ 250	21	133	102	41	P6102

- Note:**
- As UL rule, the brace member is available with both brace pipe (1", 1-1/4", 1-1/2", or 2") and 1/4" min thickness angle iron.
 - As FM rule, only brace pipe is available with size 1", 1-1/4", 1-1/2", or 2" NPS Sch40, GB/T3091, EN10255 Heavy, AS1074 Heavy or JIS G3454.

I-Beam attachment (Beam clamp)



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Cast iron
- Surface: Electro-galvanized
- Application: Attach to steel structure, perpendicular to the axis and the bottom of the I-Beam

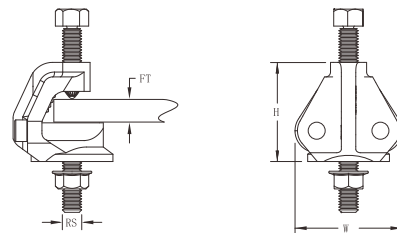

Available size

Sprinkler pipe to be braced		I-Beam flange THK (FT)	Rod size (RS)	Dimension (mm)		Ref. No.
NPS	DN			H	W	
1" ~ 8"	25 ~ 200	1/4" ~ 3/4"	1/2"	64	70	P6201