



K8.0 ECLH HSW sprinkler

K8.0 ECLH (Extended coverage light hazard) HSW sprinkler is designed for use in light hazard occupancies, and it provides max coverage area of 396 ft² (36.8 m²) as NFPA 13.

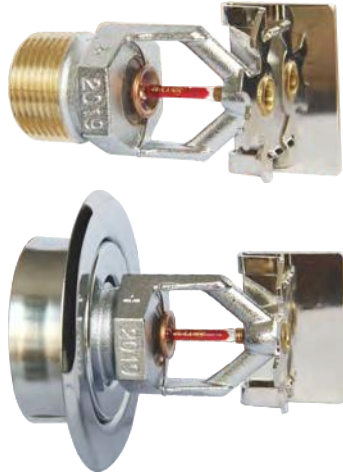

- Certificate: UL Listed / FM Approved
- Standard: UL 199, NFPA 13
- Feature: K8.0 (K115), ECLH, min spacing 8 ft
- W. pressure: 175 psi
- T. pressure: 500 psi, factory hydrostatic test
- O. pressure: Min 7 psi
- Surface: Rough brass / chrome plated / white painted, etc.

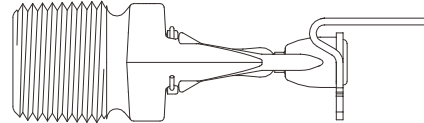

Main parts and material

Deflector	Bronze	Heat responsive element	Glass bulb, 3 mm diameter
Frame	Brass / bronze	Sealing assembly	Beryllium nickel spring + Teflon tape

Available size

Type	Nominal K-Factor	Response type		Temperature rating	Connection	Working pressure (psi)	Ref. No.
		UL	FM				
ECLH horizontal sidewall (HSW)	K8.0 (K115)	QR	QR	135°F (57°C)	3/4", NPT or BSPT	175	S2801 (UL/FM)
ECLH horizontal sidewall (HSW)	K8.0 (K115)	QR	QR	155°F (68°C)	3/4", NPT or BSPT	175	S2802 (UL/FM)
ECLH horizontal sidewall (HSW)	K8.0 (K115)	QR	QR	175°F (79°C)	3/4", NPT or BSPT	175	S2803 (UL/FM)
ECLH horizontal sidewall (HSW)	K8.0 (K115)	QR	/	200°F (93°C)	3/4", NPT or BSPT	175	S2804 (UL)
ECLH recessed horizontal sidewall (HSW)	K8.0 (K115)	QR	QR	135°F (57°C)	3/4", NPT or BSPT	175	S2805 (UL/FM)
ECLH recessed horizontal sidewall (HSW)	K8.0 (K115)	QR	QR	155°F (68°C)	3/4", NPT or BSPT	175	S2806 (UL/FM)
ECLH recessed horizontal sidewall (HSW)	K8.0 (K115)	QR	QR	175°F (79°C)	3/4", NPT or BSPT	175	S2807 (UL/FM)
ECLH recessed horizontal sidewall (HSW)	K8.0 (K115)	QR	/	200°F (93°C)	3/4", NPT or BSPT	175	S2808 (UL)

- Note:**
- As UL rule of 4-12" below ceiling, it is SR or QR sprinkler at max coverage area (ft x ft) 14 x 24, 14 x 26, 16 x 16, 16 x 18, 16 x 20, 16 x 22, 16 x 24, 18 x 18, 18 x 20, and 18 x 22, with different temperature rating.
 - As FM rule, it is only QR sprinkler at max coverage area (ft x ft) 16 x 16, 18 x 18, 16 x 20, 16 x 22, and 16 x 24.
 - For recessed sprinkler, it is assembled with a specified recessed escutcheon which provides adjustment up to 3/4" (19.1 mm).