


Malleable cast iron countersunk plug



- Certificate: UL Listed / FM Approved / NSF 61
- Standard: ISO 49 / EN 10242, symbol C
- Material: BS EN 1562, EN-GJMB-350-10
- Thread: BSPT
- W. pressure: 20 ~ 25 bar, ≤ PN25
- Surface: Black iron / hot dip galvanized

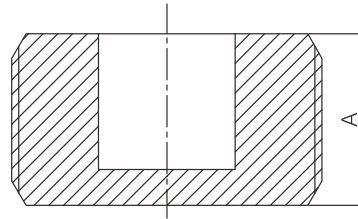

Available size

Inch	Size		A (min)	Ref. No.
	DN	mm	mm	
1/2"	15	21.3	15	M3603 (UL/FM)
3/4"	20	26.9	16	M3604 (UL/FM)
1"	25	33.7	19	M3605 (UL/FM)
1-1/4"	32	42.4	20	M3606 (UL/FM)
1-1/2"	40	48.3	21	M3607 (UL/FM)
2"	50	60.3	22	M3608 (UL/FM)
2-1/2"	65	76.1	27	M3609 (UL/FM)
3"	80	88.9	39	M3610 (UL/FM)

Note: NSF 61 certificate is available for M3603 ~ M3610.