


Malleable cast iron hubbed threaded flange



- Certificate: UL Listed / FM Approved
- Standard: Refer to ISO 49 / EN 10242, symbol C
- Material: ISO 5922, JMB/350-10
- Thread: BSPT
- Flange facing: EN 1092-2, FF / RF
- Pressure rating: PN16
- Surface: Black iron / hot dip galvanized

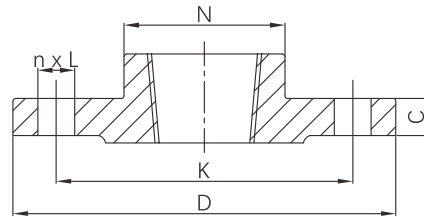

Available size

Size		Outside dia.	Neck dia.	Flange thk.	Bolt circle dia.	Bolting (No. x size)	Ref. No.
DN	OD (mm)	D (mm)	N (mm)	C (mm)	K (mm)	n x L	
32	42.4	140	60	18	100	4 x M16	M4306 (UL/FM)
40	48.3	150	70	18	110	4 x M16	M4307 (UL/FM)
50	60.3	165	84	20	125	4 x M16	M4308 (UL/FM)
65	76.1	185	104	20	145	8(4) x M16*	M4309 (UL/FM)
80	88.9	200	120	20	160	8 x M16	M4310 (UL/FM)
100	114.3	220	140	22	180	8 x M16	M4311 (UL/FM)

Note: * The DN 65 malleable cast iron flange with PN16 can be supplied with 4 holes, so to match EN 1092-1(Carbon steel flange) and EN 1092-3 (Copper alloy flange) connection.