


## Manual operated lever control foam monitor (500 to 1000 GPM)

Manual operated lever control foam monitor is designed with large clear waterway to deliver a powerful and far-reaching foam stream. It is mounted in fixed installation or on vehicle for one man operation.



- Certificate: UL Listed
- Standard: NFPA 11, UL 162, GB 19156
- Connection: Flanged as ANSI Class 150, EN 1092 PN16, etc.
- Feature: Lever control, straight jet, wide spray
- Rotation: 360° horizontal
- Elevation: 90° above + 65° below
- W. pressure: 200 psi
- Surface: Red FBE coating

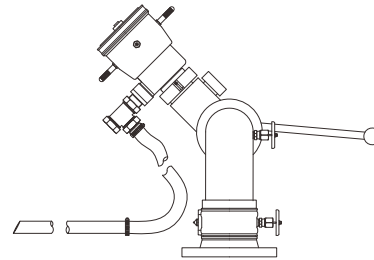

### Main parts and material

<b>Construction</b>	Bronze	<b>Pre-assembly nozzle</b>	Bronze, with pick-up tube for self-inducting type
<b>Control</b>	Hand lever or tiller, carbon steel	<b>Other components</b>	Double-row SS ball bearing in swivel joint, twist lock, pressure gauge as option

### Available size

Flow @ 100 psi (7 bar)		Material	Base inlet	Outlet for nozzle	Nozzle type	Foam concentrate	Ref. No.
GPM	LPM						
500	1900	Bronze	3" or 4" FLG	3" BSP or NH	Self-inducting	AFFF 3%	B3301 (UL)
750	2850	Bronze	3" or 4" FLG	3" BSP or NH	Self-inducting	AFFF 3%	B3302 (UL)
500	1900	Bronze	3" or 4" FLG	3" BSP or NH	Non self-inducting	0.5% ~ 6% premixed	B3303 (UL)
750	2850	Bronze	3" or 4" FLG	3" BSP or NH	Non self-inducting	0.5% ~ 6% premixed	B3304 (UL)
1000	3800	Bronze	3" or 4" FLG	3" BSP or NH	Non self-inducting	0.5% ~ 6% premixed	B3305 (UL)