


Manual operated single wheel control foam monitor

Manual operated single wheel control foam monitor is designed with large clear waterway to deliver a powerful and far-reaching foam stream. It is mounted in fixed installation or on vehicle for one man operation.



- Certificate: FM Approved
- Standard: NFPA 11, UL 162, GB 19156
- Connection: Threaded, flanged as ANSI Class 150, EN 1092 PN16, etc.
- Feature: Single handwheel control, straight jet, wide spray
- Rotation: 360° horizontal
- Elevation: 70° above + 60° below
- W. pressure: 200 psi
- Surface: Red FBE coating

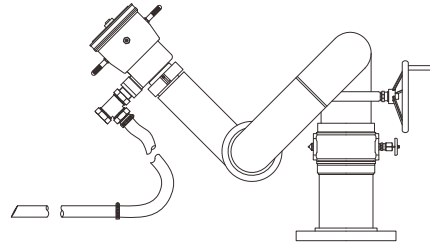

Main parts and material

Construction	Brass	Pre-assembly nozzle	Brass, with pick-up tube
Control	Single handwheel with worm gear	Other components	Double-row SS ball bearing in swivel joint, twist lock

Available size

Flow @ 100 psi (7 bar)		Material	Base inlet	Outlet for nozzle	Nozzle type	Foam concentrate	Ref. No.
GPM	LPM						
225	855	Brass	3" THD / 3" or 4" FLG	2-1/2" NH	Self-inducting	1%, 3%	B3601 (FM)
350	1330	Brass	3" THD / 3" or 4" FLG	2-1/2" NH	Self-inducting	0.5% ~ 6%	B3602 (FM)
500	1900	Brass	3" THD / 3" or 4" FLG	2-1/2" NH	Self-inducting	0.5% ~ 6%	B3603 (FM)
750	2850	Brass	3" THD / 3" or 4" FLG	2-1/2" NH	Self-inducting	0.5% ~ 6%	B3604 (FM)
1000	3800	Brass	3" THD / 3" or 4" FLG	2-1/2" NH	Self-inducting	1%, 3%	B3605 (FM)*
225, 350, 500	855, 1330, 1900	Brass	3" THD / 3" or 4" FLG	2-1/2" NH	Self-inducting	1%, 3%, 6%	B3606 (FM)
350, 500, 750	1330, 1900, 2850	Brass	3" THD / 3" or 4" FLG	2-1/2" NH	Self-inducting	0.5% ~ 6%	B3607 (FM)

Note:

1. For flanged type base inlet, it is FM. For threaded type base inlet, it is ISO.
2. *For B3605, the fire monitor is FM, and the pre-assembly monitor nozzle is ISO.