



Running nipple, close nipple and barrel nipple

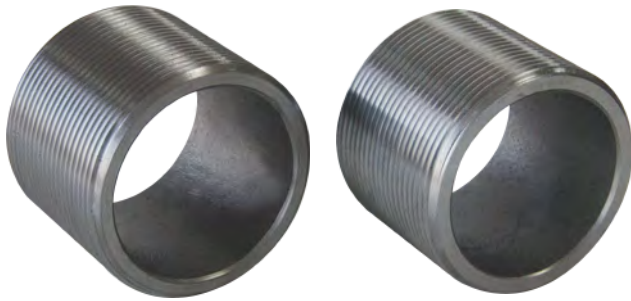

- Certificate: ISO
- Standard: EN 10241
- Material: EN 10241, seamless / welded fitting
- Thread: BSPP / BSPT / NPT
- Hydro test: Seamless: min 150 bar; welded: min 75 bar
- Surface: Oiled / hot dip galvanized

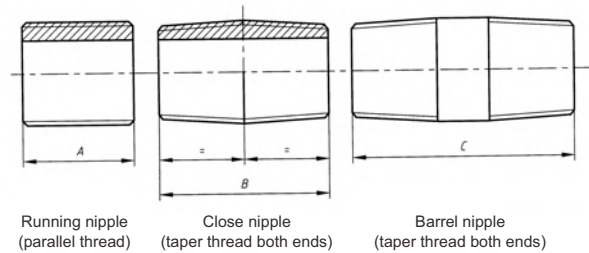

Available size for running nipple (BSPP)

Size			Thickness (mm)		Overall length	Ref. No.
NPS	DN	OD (mm)	Medium	Heavy	A (mm)	
1/2"	15	21.3	2.6	3.2	27	NE2301
3/4"	20	26.9	2.6	3.2	30	NE2302
1"	25	33.7	3.2	4.0	33	NE2303
1-1/4"	32	42.4	3.2	4.0	38	NE2304
1-1/2"	40	48.3	3.2	4.0	38	NE2305
2"	50	60.3	3.6	4.5	48	NE2306
2-1/2"	65	76.1	3.6	4.5	51	NE2307
3"	80	88.9	4.0	5.0	57	NE2308
4"	100	114.3	4.5	5.4	70	NE2309
5"	125	139.7	5.0	5.4	78	NE2310
6"	150	165.1 / 168.3	5.0	5.4	78	NE2311

Running nipple, close nipple and barrel nipple

Available size for Close nipple (BSPT)

Size			Thickness (mm)		Overall length	Ref. No.
NPS	DN	OD (mm)	Medium	Heavy	B (mm)	
1/2"	15	21.3	2.6	3.2	37	NE2321
3/4"	20	26.9	2.6	3.2	39	NE2322
1"	25	33.7	3.2	4.0	46	NE2323
1-1/4"	32	42.4	3.2	4.0	51	NE2324
1-1/2"	40	48.3	3.2	4.0	51	NE2325
2"	50	60.3	3.6	4.5	60	NE2326
2-1/2"	65	76.1	3.6	4.5	69	NE2327
3"	80	88.9	4.0	5.0	75	NE2328
4"	100	114.3	4.5	5.4	87	NE2329
5"	125	139.7	5.0	5.4	96	NE2330
6"	150	165.1 / 168.3	5.0	5.4	96	NE2331

Available size for Barrel nipple (BSPT)

Size			Thickness (mm)		Overall length	Ref. No.
NPS	DN	OD (mm)	Medium	Heavy	C (mm)	
1/2"	15	21.3	2.6	3.2	51	NE2341
3/4"	20	26.9	2.6	3.2	54	NE2342
1"	25	33.7	3.2	4.0	60	NE2343
1-1/4"	32	42.4	3.2	4.0	70	NE2344
1-1/2"	40	48.3	3.2	4.0	70	NE2345
2"	50	60.3	3.6	4.5	79	NE2346
2-1/2"	65	76.1	3.6	4.5	89	NE2347
3"	80	88.9	4.0	5.0	102	NE2348
4"	100	114.3	4.5	5.4	114	NE2349
5"	125	139.7	5.0	5.4	124	NE2350
6"	150	165.1 / 168.3	5.0	5.4	127	NE2351