


Galvanized steel fire protection water tank

Galvanized steel fire protection water tank is a water storage container to provide water source for fire sprinkler, hose or pump for fire protection purpose. It is assembled by modular bolted panel with easy and fast installation.



- Certificate: ISO
- Standard: Refer to NFPA 22, AWWA D103, EN 12845, 12S101
- Feature: Modular panel with bolted connection, inner liner sealing
- Nozzle: Flanged / grooved / threaded connection
- Surface: Hot dip galvanized tank, red painted frame
- Performance: Universal building code seismic 4, wind load

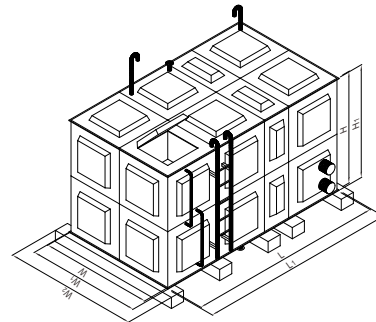

Main parts and material

Shell	Galvanized steel modular panel, size 1000x1000 / 1000x500 / 500x500mm	Roof and bottom	Galvanized steel plate, thickness 3 / 4 / 5mm
Liner	Flexible sealing tape, PVC, PU	Nozzle type	Inlet, outlet, vent, overflow, drain, size DN15 to DN250
Foundation	Steel frame, 2 continuous lines of steel footing plates	Standard accessories	Internal bracing rod, ladder, manhole, water level gauge

Available size

Tank volume (m ³)	Inside dimension (mm)			Overall dimension (mm)			Foundation	Ref. No.
	L	W	H	L1	W1	H1	W2 (mm)	
1	1000	1000	1000	1100	1100	1100	1200	U7101
3	2000	1500	1000	2100	1600	1100	1700	U7102
4.5	2000	1500	1500	2100	1600	1600	1700	U7103
6	2000	2000	1500	2100	2100	1600	2200	U7104
12	3000	2000	2000	3100	2100	2100	2200	U7105

Galvanized steel fire protection water tank

Available size

Tank volume (m ³)	Inside dimension (mm)			Overall dimension (mm)			Foundation	Ref. No.
	L	W	H	L1	W1	H1	W2 (mm)	
15	3000	2500	2000	3100	2600	2100	2700	U7106
18	3000	3000	2000	3100	3100	2100	3200	U7107
30	4000	3000	2500	4100	3100	2600	3200	U7108
36	4000	3000	3000	4100	3100	3100	3200	U7109
42	4000	3500	3000	4100	3600	3100	3700	U7110
54	4500	4000	3000	4600	4100	3100	4200	U7111
60	5000	4000	3000	5100	4100	3100	4200	U7112
70	5000	4000	3500	5100	4100	3600	4200	U7113
96	6000	4000	4000	6100	4100	4100	4200	U7114
140	7000	5000	4000	7100	5100	4100	5200	U7115
180	8000	5000	4500	8100	5100	4600	5200	U7116
225	9000	5000	5000	9100	5100	5100	5200	U7117
360	10000	6000	6000	10100	6100	6100	6200	U7118

Note:

1. It can be supplied with internal division walls as customized.
2. It can be fitted with double liners for secondary sealing.