


Air maintenance device

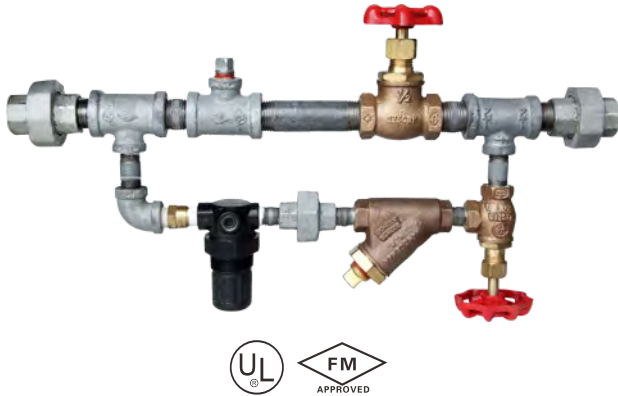

- Certificate: UL Listed / FM Approved
- Standard: Refer to UL 260, FM 1011/1012/1013
- Construction: Full assembly of valves and pipe fittings
- Function: Automatic, field-adjustable, pressure reducing device
- Inlet pressure: 200 psi, air or nitrogen
- Surface: Hot dip galvanized and rough bronze, etc.

Available size

Inlet	Outlet	Standard valve components	Other accessories	Max inlet pressure	Outlet pressure	Ref. No.
1/2" NPT, from compressed air supply	1/2" NPT, to system	Air control valve, strainer, pressure regulator, Restrictor check valve, By-pass valve	Carbon steel nipple, malleable iron tee, elbow, union, etc.	200 psi	5 ~ 70 psi	V9401 (UL/FM)

Automatic shut-off valve



- Certificate: UL Listed / FM Approved
- Standard: Refer to UL 260, FM 1011/1012/1013
- Use: Trim component for deluge valve used in deluge and preaction systems
- Function: To prevent inadvertent resetting of the valve after its initial operation
- W. pressure: 250 psi
- Surface: Bright brass or stainless steel

Available size

Inlet	Outlet	Assembly	Maximum working pressure	Ref. No.
1/2" NPT	1/2" NPT	Brass or stainless steel body, cover, and center seat; Stainless Steel spring, Nylon fabric reinforced, Natural Rubber diaphragm	250 psi	V9411 (UL/FM)