




Constant gallonage self-inducting foam monitor nozzle (ISO)

- Certificate: ISO
- Standard: NFPA 11, UL 162, GB 19156
- Material: Aluminum or brass
- Feature: Self-inducting with pick-up tube, straight jet and wide spray
- W. pressure: 200 psi
- Surface: Hard anodized / rough

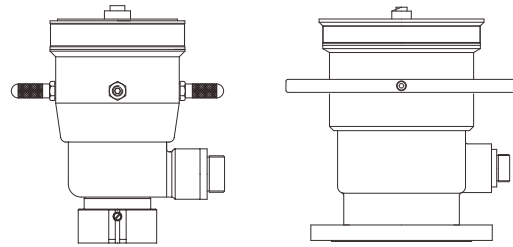

Available size (Source 1 with ISO)

Flow @ 100 psi (7 bar)		Material	Water inlet	Foam concentrate inlet	Proportioning	Ref. No.
GPM	LPM					
150	570	AL	2-1/2" NH	Quick connection	3%, 6%	B6501 (ISO)
225	855	AL / brass	2-1/2" NH	Quick connection	3%, 6%	B6502 (ISO)
350	1330	AL / brass	2-1/2" NH	Quick connection	0.5% ~ 6%	B6503 (ISO)
500	1900	AL	2-1/2" NH	Quick connection	0.5% ~ 6%	B6504 (ISO)
750	2850	AL	2-1/2" NH	Quick connection	0.5% ~ 6%	B6505 (ISO)
1000	3800	AL / brass	2-1/2" NH	Quick connection	1%, 3%	B6506 (ISO)

Available size (Source 3 with ISO)

Flow @ 100 psi (7 bar)		Material	Water inlet	Foam concentrate inlet	Proportioning	Ref. No.
GPM	LPM					
316	1200	AL	2-1/2" NH	Quick connection	0.5% ~ 6%	B6531 (ISO)
474	1800	AL	2-1/2" NH	Quick connection	0.5% ~ 6%	B6532 (ISO)
632	2400	AL	2-1/2" NH	Quick connection	0.5% ~ 6%	B6533 (ISO)
789	3000	AL	3-1/2" NH	Quick connection	0.5% ~ 6%	B6534 (ISO)
947	3600	AL	3-1/2" NH	Quick connection	0.5% ~ 6%	B6535 (ISO)
1263	4800	AL	3-1/2" NH	Quick connection	0.5% ~ 6%	B6536 (ISO)