


## Universal structural attachment



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to concrete structure

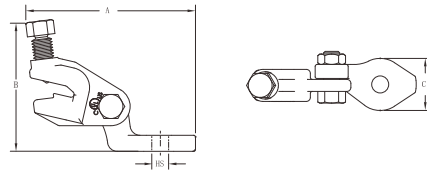

### Available size


Bracing pipe		Hole size (HS)		Dimension (mm)			Ref. No.
NPS	DN	Inch	mm	A	B	C	
1" ~ 2"	25 ~ 50	9/16"	14	133	102	41	P6101
1" ~ 2"	25 ~ 50	13/16"	21	133	102	41	P6102

- Note:**
- As UL rule, the brace member is available with both brace pipe (1", 1-1/4", 1-1/2", or 2") and 1/4" min thickness angle iron.
  - As FM rule, only brace pipe is available with size 1", 1-1/4", 1-1/2", or 2" NPS Sch40, GB/T3091, EN10255 Heavy, AS1074 Heavy or JIS G3454.

## Universal structural bracket



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to concrete, wood, bar joist or I-beam adapters



### Available size

Bracing pipe		Hole size (HS)		Dimension (mm)				Ref. No.
NPS	DN	Inch	mm	W	T	A	B	
1" ~ 2"	25 ~ 50	9/16"	14	49	5	52	33	P6201
1" ~ 2"	25 ~ 50	13/16"	21	49	5	52	33	P6202
1" ~ 2"	25 ~ 50	1-1/16"	17	49	5	52	33	P6203