


Universal structural attachment



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to concrete structure

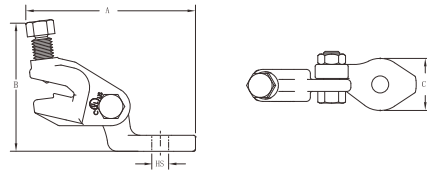

Available size


| Bracing pipe | | Hole size (HS) | | Dimension (mm) | | | Ref. No. |
|--------------|---------|----------------|----|----------------|-----|----|----------|
| NPS | DN | Inch | mm | A | B | C | |
| 1" ~ 2" | 25 ~ 50 | 9/16" | 14 | 133 | 102 | 41 | P6101 |
| 1" ~ 2" | 25 ~ 50 | 13/16" | 21 | 133 | 102 | 41 | P6102 |

- Note:**
- As UL rule, the brace member is available with both brace pipe (1", 1-1/4", 1-1/2", or 2") and 1/4" min thickness angle iron.
 - As FM rule, only brace pipe is available with size 1", 1-1/4", 1-1/2", or 2" NPS Sch40, GB/T3091, EN10255 Heavy, AS1074 Heavy or JIS G3454.

Universal structural bracket



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to concrete, wood, bar joist or I-beam adapters



Available size

| Bracing pipe | | Hole size (HS) | | Dimension (mm) | | | | Ref. No. |
|--------------|---------|----------------|----|----------------|---|----|----|----------|
| NPS | DN | Inch | mm | W | T | A | B | |
| 1" ~ 2" | 25 ~ 50 | 9/16" | 14 | 49 | 5 | 52 | 33 | P6201 |
| 1" ~ 2" | 25 ~ 50 | 13/16" | 21 | 49 | 5 | 52 | 33 | P6202 |
| 1" ~ 2" | 25 ~ 50 | 1-1/16" | 17 | 49 | 5 | 52 | 33 | P6203 |