


I-Beam attachment (Beam clamp)



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Cast iron
- Surface: Electro-galvanized
- Application: Attach to steel structure, perpendicular to the axis and the bottom of the I-Beam

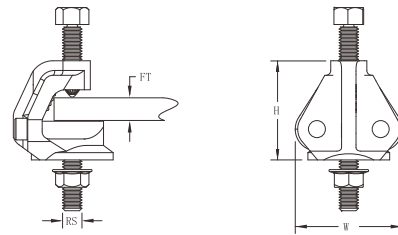


Available size

| I-Beam flange | | Rod size (RS) | | Dimension (mm) | | Ref. No. |
|-------------------------|-----------------------------|---------------|--------|----------------|----|----------|
| THK | Width | UNC | Metric | H | W | |
| 1/4" ~ 3/4" (6 ~ 19 mm) | 4" ~ 14-1/2" (102 ~ 368 mm) | 1/2" | M12 | 64 | 70 | P6301 |

Adjustable I-Beam attachment (Beam clamp)



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to steel structure, perpendicular to the axis and the bottom of the I-Beam

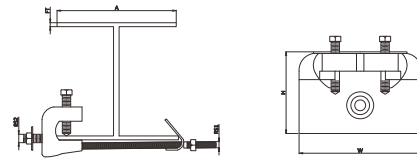

Available size

| I-Beam flange | | Rod size | | Dimension (mm) | | Ref. No. |
|----------------------------|-----------------------------|------------|------------|----------------|----|----------|
| THK | Width | RS1 | RS2 | H | W | |
| 1/4" ~ 3/4" (6 ~ 19 mm) | 4" ~ 8-1/2" (100 ~ 215 mm) | 3/8" (M10) | 1/2" (M12) | 67 | 92 | P6311 |
| 1/4" ~ 3/4" (6 ~ 19 mm) | 4" ~ 14-1/2" (100 ~ 365 mm) | 3/8" (M10) | 1/2" (M12) | 67 | 92 | P6312 |
| 3/4" ~ 1-1/4" (19 ~ 32 mm) | 4" ~ 18" (100 ~ 455 mm) | 3/8" (M10) | 1/2" (M12) | 79 | 92 | P6313 |