


Waste cone

Waste cone provides quick-and-easy visual confirmation of proper water flow. Two sight glasses extending from the center allow users to observe the flow and ensure that fire pump pressure relief valve is working correctly.



- Certificate: ISO
- Standard: NFPA 20
- Connection: Flanged as ANSI 16.42 Class 150 / 300, FF or RF
- Surface: FBE coating as AWWA C550

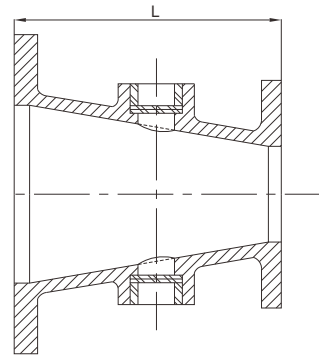

Main parts and material

Body	Ductile iron as ASTM A536, 65-45-12	Sight glass	2 x 2" SS 304 / 316, close type
Body casting	Single body, no welding	/	/

Available size (Source 1 with ISO)

Connection size		Length (mm)	Connection	Ref. No.
Inch	DN			
2" x 2-1/2"	50 x 65	210	Class 150	U1601
3" x 5"	80 x 125	210	Class 150	U1602
3" x 6"	80 x 150	229	Class 150	U1603
4" x 6"	100 x 150	229	Class 150	U1604
4" x 8"	100 x 200	260	Class 150	U1605
6" x 8"	150 x 200	260	Class 150	U1606
6" x 10"	150 x 250	292	Class 150	U1607
8" x 10"	200 x 250	292	Class 150	U1608
8" x 12"	200 x 300	330	Class 150	U1609
8" x 14"	200 x 350	356	Class 150	U1610
10" x 12"	250 x 300	330	Class 150	U1611
10" x 16"	250 x 400	406	Class 150	U1612

Waste cone

Available size (Source 2 with ISO)

Connection size		Length (inch)	Connection	Ref. No.
Inch	DN			
3" x 5"	80 x 125	8.25" / 9.24"	Class 150 / 300	U1621
3" x 6"	80 x 150	9.00" / 9.69"	Class 150 / 300	U1622
4" x 6"	100 x 150	9.00" / 9.75"	Class 150 / 300	U1623
4" x 8"	100 x 200	10.25" / 11.06"	Class 150 / 300	U1624
6" x 8"	150 x 200	10.25" / 11.19"	Class 150 / 300	U1625
6" x 10"	150 x 250	11.50" / 12.63"	Class 150 / 300	U1626
8" x 12"	200 x 300	13.00" / 14.25"	Class 150 / 300	U1627
8" x 14"	200 x 350	14.00" / 15.25"	Class 150 / 300	U1628