


Steel IMC conduit

Steel IMC conduit (intermediate metal conduit) is thin-wall alternative to RMC, lighter than RMC but heavier than EMT. It is rigid, medium-walled, threaded ERW tube used as a metal raceway for protecting and routing of electrical wiring.



- Certificate: UL Listed
- Standard: UL 1242 / ANSI C80.6
- Material: Carbon steel strip
- Surface: Hot dip galvanized

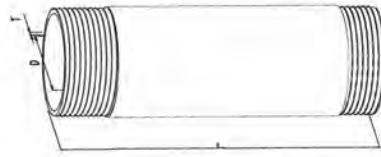

Available size

Trade size	Metric designator	OD	Thickness	Length	Ref. No.
		D (mm)	T (mm)	L (m)	
1/2"	16	20.70	1.98	3.05 (10 ft)	C1301
3/4"	21	26.10	2.10	3.05 (10 ft)	C1302
1"	27	32.77	2.35	3.05 (10 ft)	C1303
1-1/4"	35	41.59	2.42	3.05 (10 ft)	C1304
1-1/2"	41	47.82	2.54	3.05 (10 ft)	C1305
2"	53	59.93	2.67	3.05 (10 ft)	C1306
2-1/2"	63	72.57	3.81	3.05 (10 ft)	C1307
3"	78	88.29	3.81	3.05 (10 ft)	C1308
4"	103	113.44	3.81	3.05 (10 ft)	C1309

Note:

1. OD tolerance: OD 1/2" ~ 1", $\pm 0.13\text{mm}$ (0.005"); OD 1-1/4" ~ 2", $\pm 0.19\text{mm}$ (0.0075"); OD 2-1/2" ~ 4", $\pm 0.25\text{mm}$ (0.010").
2. Length tolerance: $\pm 6.35\text{mm}$ (1/4") without coupling.