


## Breeching inlet

Breeching inlet (Inlet breeching) is normally located on the ground floor of building to enable the fire and rescue service to connect hoses to supply water into dry riser, so that water can be pumped up to higher floors.



- Certificate: BSI / LPCB Approved
- Standard: BS 5041-3
- Connection: Flanged to EN 1092-2
- Temperature: 0°C to 38°C
- Test pressure: 30 bar
- Surface: Red powder coating (RAL 3000)

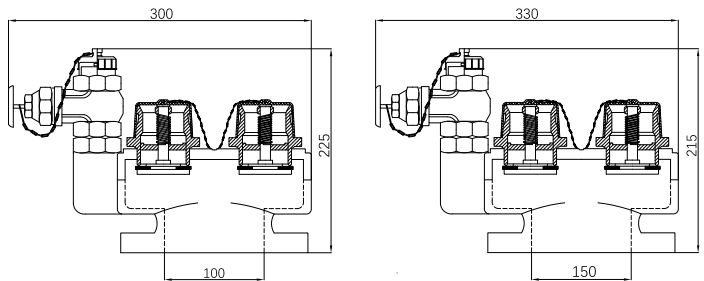

### Main parts and material

<b>Body</b>	Spheroidal graphite iron (Ductile iron) as BS 2789	<b>Inlet connection for hose</b>	Copper alloy to BS 1400, with non-return valve
<b>Drain valve</b>	Copper alloy to BS 1400, design to BS 5154	<b>Blank cap</b>	Plastic or rubber, with chain

### Available size

Way of inlet	Inlet	Outlet	Drain valve outlet	Working pressure (bar)	Ref. No.
2-way	(2) 2.5" BS336	Flanged DN 100	1", male BSPT	20	FE0601
4-way	(4) 2.5" BS336	Flanged DN 150	1", male BSPT	20	FE0602