


## Layflat fire hose (Type 2)

Layflat fire hose is typically used by the fire service to convey large quantities of high pressure water to the fire. For type 2 hose, an elastomeric coating provides good protection against liquid absorption and improves resistance to abrasion.



- Certificate: ISO
- Standard: BS 6391
- Feature: Type 2, coated
- Color: Red, yellow, or customized
- Temperature: -40°C to 70°C

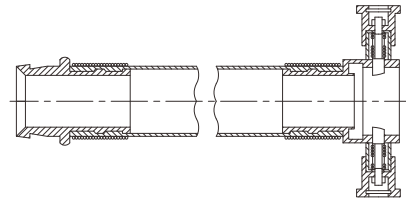

### Main parts and material

<b>Lining</b>	EPDM, impermeable elastomeric layer	<b>Jacket (Reinforcement)</b>	100% high tenacity polyester, circular woven
<b>Coating</b>	Elastomeric, improve resistance to liquid and abrasion	<b>Coupling</b>	Aluminum / copper

### Available size

Size	Type	End connection	Length (m)	Max. working pressure (bar)	Proof pressure (bar)	Burst pressure (bar)	Ref. No.
DN 40 (1.5")	Coated	BS336 / Storz / DSP / Machino, etc.	15, 25, 30, 45, etc.	15	22.5	45	FE3201
DN 50 (2")	Coated	BS336 / Storz / DSP / Machino, etc.	15, 25, 30, 45, etc.	15	22.5	45	FE3202
DN 65 (2.5")	Coated	BS336 / Storz / DSP / Machino, etc.	15, 25, 30, 45, etc.	15	22.5	45	FE3203

- Note:**
1. The couplings are pre-assembled on both ends of fire hose through galvanized mild steel wire and applied over a hose guard for protection.
  2. Other size is available, including 1.75", 3", 4", etc.