

Sight glass




- Certificate: ISO
- Material: Brass / bronze / SS / WCB
- Connection: Thread / Flanged
- Feature: Discharge side of drain valve
- Temperature: -30°C to 120°C
- W. pressure: PN 16 (1.6 MPa)
- Surface: Rough brass / SS

Available size

Size		Material	Waterway	Connection	Working pressure	Ref. No.
Inch	DN					
1"	25	Brass / bronze / SS / WCB	Full flow	BSPT / NPT	PN 16	VC1901
1-1/4"	32	Brass / bronze / SS / WCB	Full flow	BSPT / NPT	PN 16	VC1902
1-1/2"	40	Brass / bronze / SS / WCB	Full flow	BSPT / NPT	PN 16	VC1903
2"	50	Brass / bronze / SS / WCB	Full flow	BSPT / NPT	PN 16	VC1904
2-1/2"	65	Brass / bronze / SS / WCB	Full flow	Flanged	PN 16	VC1905

Note: For outlet connection, it is also available for restricted orifice 7/16", 1/2", or 17/32".

Ball float valve

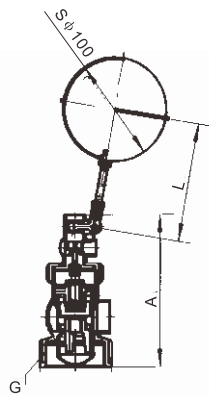

- Certificate: ISO
- Material: Brass
- Connection: Thread, BSPP (G)
- Feature: Indicating tank water level
- Temperature: 0°C to 60°C
- W. pressure: 87psi (0.6 MPa)
- Open the pressure: 5.8psi (0.04MPa)

Available size

Size		Dimension (mm)		Connection	Working pressure (psi)	Ref. No.
Inch	DN	A	L			
1/2"	15	70	260	BSPP (G)	87	VC2001
3/4"	20	119	260	BSPP (G)	87	VC2002
1"	25	119	260	BSPP (G)	87	VC2003
1-1/4"	32	133	260	BSPP (G)	87	VC2004
1-1/2"	40	147	260	BSPP (G)	87	VC2005
2"	50	151	260	BSPP (G)	87	VC2006
2-1/2"	65	195	260	BSPP (G)	87	VC2007
3"	80	228	260	BSPP (G)	87	VC2008
4"	100	250	260	BSPP (G)	87	VC2009