



## Universal beam clamp

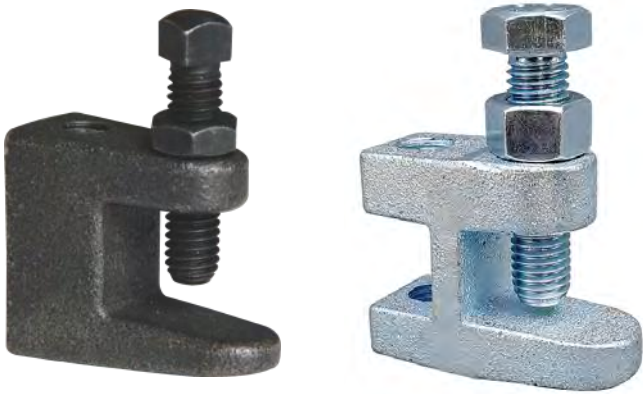

- Certificate: UL Listed / FM Approved
- Standard: UL 203, MSS SP-58 / 69 (Type-19/23)
- Material: Ductile iron body, hardened steel cup point set screw and locknut
- Surface: Plain black / electro-galvanized
- Application: Attachment to top or bottom of beam

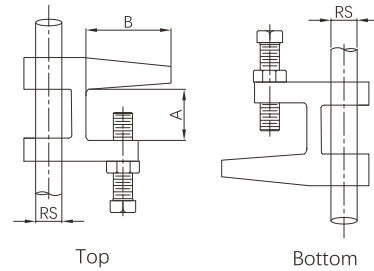

### Available size


Pipe size		Hanger Rod Size (RS)		Dimension (mm)		Max recommend load (N)		Ref. No.
NPS	DN	UNC	Metric	A	B	Top	Bottom	
1/2" ~ 4"	15 ~ 100	3/8"	M10	20	29	2220	1110	P5101
5" ~ 8"	125 ~ 200	1/2"	M12	20	32	4220	3380	P5102

**Note:** It is approved for use with set screw on load side and opposite load side.

## Purlin clamp



- Certificate: UL Listed / FM Approved
- Standard: UL 203, MSS SP-58/69 (Type-23)
- Material: Ductile iron body, hardened steel cup point set screw and locknut
- Surface: Plain black / electro-galvanized
- Application: Attachment to steel purlin



### Available size

Pipe size		Hanger Rod Size (RS)		Dimension (mm)				Max recommend load (N)	Ref. No.
NPS	DN	UNC	Metric	A	B	C	D		
1/2" ~ 4"	15 ~ 100	3/8"	M10	72	36	88	16	1780	P5201

**Note:** It is approved for use with set screw on load side only.

P51-P52 /