



Universal beam clamp

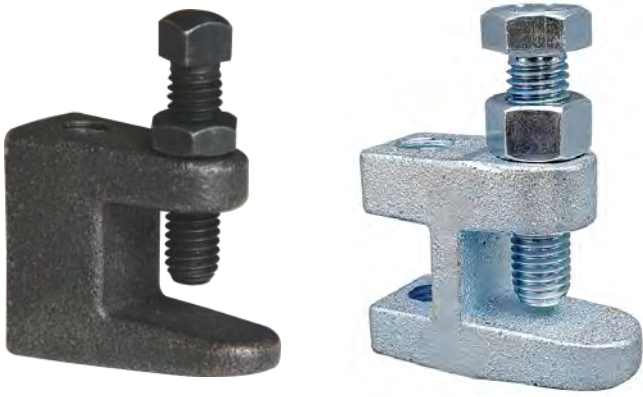

- Certificate: UL Listed / FM Approved
- Standard: UL 203, MSS SP-58 / 69 (Type-19/23)
- Material: Ductile iron body, hardened steel cup point set screw and locknut
- Surface: Plain black / electro-galvanized
- Application: Attachment to top or bottom of beam

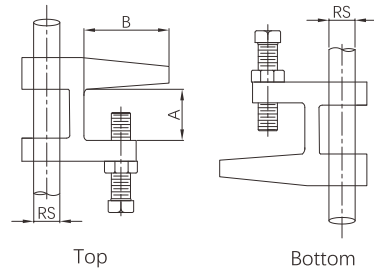

Available size (Inch / imperial)

Pipe size		Hanger Rod Size (RS)	Dimension		Max recommend load (Lbs)		Ref. No.
NPS	DN	UNC	A	B	Top	Bottom	
1/2" ~ 4"	15 ~ 100	3/8"	3/4"	1-1/8"	500	250	P5101
5" ~ 8"	125 ~ 200	1/2"	3/4"	1-1/4"	950	760	P5102

Note: It is approved for use with set screw on load side and opposite load side.

Available size (Metric)

Pipe size		Hanger Rod Size (RS)	Dimension (mm)		Max recommend load (N)		Ref. No.
NPS	DN	Metric	A	B	Top	Bottom	
1/2" ~ 4"	15 ~ 100	M10	20	29	2220	1110	P5111
5" ~ 8"	125 ~ 200	M12	20	32	4220	3380	P5112

Note: It is approved for use with set screw on load side and opposite load side.