


Drop-in anchor

Drop-in anchor consists of an internal expander plug, a hollow sleeve that features a slotted and expandable skirt at one end, and a threaded fastener at the other end. It is used to install construction element flush or below the base surface.



- Certificate: ISO
- Standard: GB/T 22795
- Type: Drop-in anchor
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Install flush or below the base surface to prevent rotation of the structural design

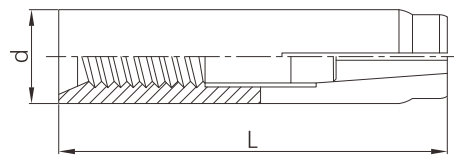

Available size (Inch / imperial)

Size	Length	Dia	Max recommend load (Lbs.)	Ref. No.
	L	d		
1/4"	1"	3/8"	450	P7601
3/8"	1-9/16"	1/2"	1300	P7603
1/2"	2"	5/8"	1800	P7604

Available size (Metric)

Size	Length L (mm)	Dia d (mm)	Max recommend load (N)	Ref. No.
M6	25	8	2000	P7621
M8	30	10	4000	P7622
M10	40	12	5800	P7623
M12	50	16	8000	P7624
M14	55	18	10000	P7625
M16	60	20	12000	P7626
M20	80	24	18000	P7627