


Quick grip Jr. lateral sway brace

Quick grip Jr. lateral sway brace is designed to help simplify installation of fire sprinkler piping for seismic or other catastrophic applications. It is used for lateral sway brace applications only.



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to fire sprinkler piping, lateral direction

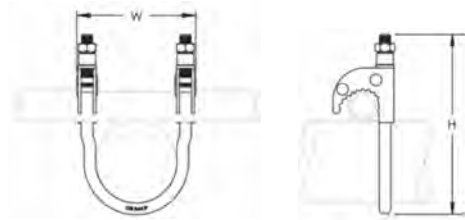

Available size

Sprinkler pipe to be braced		Sprinkler pipe thickness	Orientation	Dimension (mm)		Ref. No.
NPS	DN			W	H	
1"	25	Sch10 / Sch40	Lateral	65	130	P6523
1-1/4"	32	Sch10 / Sch40	Lateral	74	137	P6524
1-1/2"	40	Sch10 / Sch40	Lateral	80	143	P6525
2"	50	Sch10 / Sch40	Lateral	92	162	P6526