


## Brass pressure relief valve

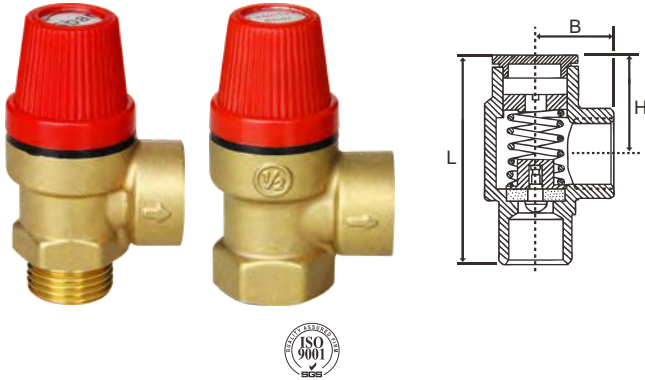

- Certificate: ISO
- Material: Brass
- Connection: Threaded, Male x Female and Female x Female
- Adjustment: 3 / 6 / 8 bar
- Temperature: 0°C to 80°C
- W. pressure: PN 16 (1.6 MPa)
- Surface: Rough brass

### Available size

| Size |    | Relief pressure (Bar) | Dimension (mm) |    |    | Connection            | Working pressure | Ref. No. |
|------|----|-----------------------|----------------|----|----|-----------------------|------------------|----------|
| Inch | DN |                       | L              | H  | B  |                       |                  |          |
| 1/2" | 15 | 3                     | 61             | 29 | 22 | BSPP (G) / BSPT / NPT | PN 16            | VC2301   |
| 1/2" | 15 | 6                     | 61             | 29 | 22 | BSPP (G) / BSPT / NPT | PN 16            | VC2302   |
| 1/2" | 15 | 8                     | 61             | 29 | 22 | BSPP (G) / BSPT / NPT | PN 16            | VC2303   |
| 3/4" | 20 | 3                     | 61             | 29 | 22 | BSPP (G) / BSPT / NPT | PN 16            | VC2304   |
| 3/4" | 20 | 6                     | 61             | 29 | 22 | BSPP (G) / BSPT / NPT | PN 16            | VC2305   |
| 3/4" | 20 | 8                     | 61             | 29 | 22 | BSPP (G) / BSPT / NPT | PN 16            | VC2306   |

## Brass threaded adapter



- Certificate: ISO
- Material: Brass
- Connection: Threaded, Female x Male
- W. pressure: 300 psi
- Surface: Rough brass

### Available size

| Size |    | Connection                     | Working pressure (psi) | Ref. No.     |
|------|----|--------------------------------|------------------------|--------------|
| NPS  | DN |                                |                        |              |
| 1/4" | 8  | BSPT F x NPT M, BSPP F x NPT M | 300                    | VC2401 (ISO) |
| 1/2" | 15 | BSPT F x NPT M, BSPP F x NPT M | 300                    | VC2402 (ISO) |
| 3/4" | 20 | BSPT F x NPT M, BSPP F x NPT M | 300                    | VC2403 (ISO) |
| 1"   | 25 | BSPT F x NPT M, BSPP F x NPT M | 300                    | VC2404 (ISO) |