



Flexible grooved coupling

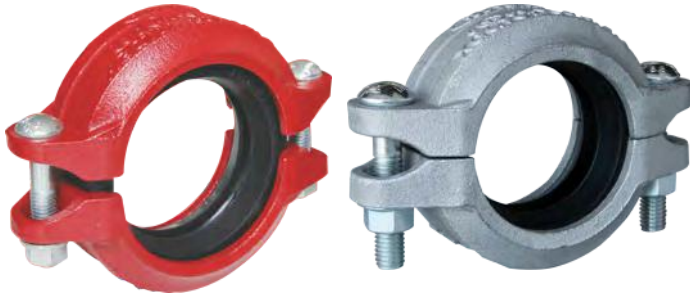

- Certificate: UL Listed / FM Approved
- Standard: ANSI / UL 213
- Housing: Ductile iron ASTM A536, 65-45-12
- Bolt & nut: Carbon steel, detail as G92 ~ G96
- Gasket: EPDM, nitrile, silicone rubber, etc.
- Rated pressure: 300 ~ 500 psi
- Surface: Red painting / hot dip galvanized

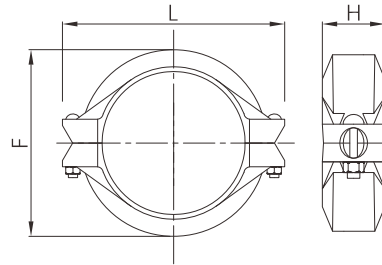

Available size

Size			Dimension (mm)			Bolting (n x bolt size)		Ref. No.
Inch	DN	mm	F	L	H	ANSI	EN	
1"	25	33.7	55	92	42	2 - 3/8" x 55	2 - M10 x 57	G5201 (UL/FM)
1-1/4"	32	42.4	65	104	44	2 - 3/8" x 55	2 - M10 x 57	G5202 (UL/FM)
1-1/2"	40	48.3	70	110	44	2 - 3/8" x 55	2 - M10 x 57	G5203 (UL/FM)
2"	50	60.3	83	125	44	2 - 3/8" x 55	2 - M10 x 57	G5204 (UL/FM)
2-1/2"	65	73.0	96	143	45	2 - 3/8" x 55	2 - M10 x 57	G5205 (UL/FM)
2-1/2"	65	76.1	100	145	45	2 - 3/8" x 55	2 - M10 x 57	G5206 (UL/FM)
3"	80	88.9	115	160	45	2 - 1/2" x 70	2 - M12 x 70	G5207 (UL/FM)
4"	100	114.3	145	198	50	2 - 1/2" x 70	2 - M12 x 70	G5208 (UL/FM)
5"	125	139.7	169	230	51	2 - 5/8" x 85	2 - M16 x 85	G5209 (UL/FM)
5"	125	141.3	170	232	51	2 - 5/8" x 85	2 - M16 x 85	G5210 (UL/FM)
6"	150	165.1	196	260	52	2 - 5/8" x 85	2 - M16 x 85	G5211 (UL/FM)
6"	150	168.3	200	265	52	2 - 5/8" x 85	2 - M16 x 85	G5212 (UL/FM)
8"	200	219.1	258	350	60	2 - 3/4" x 115	2 - M20 x 115	G5213 (UL/FM)
10"	250	273.0	337	406	65	2 - 7/8" x 125	2 - M22 x 125	G5214 (UL/FM)
12"	300	323.9	378	465	65	2 - 7/8" x 140	2 - M22 x 140	G5215 (UL/FM)

Flexible grooved coupling

Available size

Size			Dimension (mm)			Bolting (n x bolt size)		Ref. No.
Inch	DN	mm	F	L	H	ANSI	EN	
14"	350	355.6	415	510	72	3 - 7/8" x 140	3 - M22 x 140	G5216 (UL)
16"	400	406.4	468	575	72	3 - 7/8" x 140	3 - M22 x 140	G5217 (UL)
18"	450	457.2	508	608	78	3 - 7/8" x 140	3 - M22 x 140	G5218 (UL)
20"	500	508.0	563	660	78	4 - 7/8" x 140	4 - M22 x 140	G5219 (UL)
24"	600	609.6	668	772	78.	4 - 1" x 140	4 - M24 x 140	G5220 (UL)