


Universal sway brace

Universal sway brace is a device used to attach the brace member of the sway brace to the fire sprinkler piping. For universal sway brace clamp, it is used for both lateral and longitudinal sway brace applications.



- Certificate: UL Listed / FM Approved
- Standard: UL 203A, refer to NFPA 13 seismic sway bracing
- Material: Carbon steel
- Surface: Electro-galvanized
- Application: Attach to fire sprinkler piping, lateral & longitudinal direction

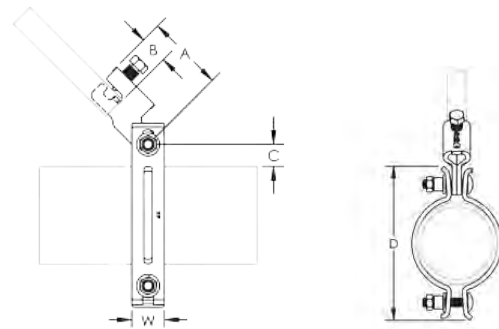

Available size

Sprinkler pipe to be braced		Sprinkler pipe thickness	Orientation	Dimension (mm)		Ref. No.
NPS	DN			A	B	
1"	25	Sch10 / Sch40	Lateral / longitudinal	91	33	P6623
1-1/4"	32	Sch10 / Sch40	Lateral / longitudinal	91	33	P6624
1-1/2"	40	Sch10 / Sch40	Lateral / longitudinal	91	33	P6625
2"	50	Sch10 / Sch40	Lateral / longitudinal	91	33	P6626
2-1/2"	65	Sch10 / Sch40	Lateral / longitudinal	91	33	P6627
3"	80	Sch10 / Sch40	Lateral / longitudinal	91	33	P6628
4"	100	Sch10 / Sch40	Lateral / longitudinal	91	33	P6629
5"	125	Sch10 / Sch40	Lateral / longitudinal	91	33	P6630
6"	150	Sch10 / Sch40	Lateral / longitudinal	91	33	P6631
8"	200	Sch10 / Sch40	Lateral / longitudinal	91	33	P6632
10"	250	Sch10 / Sch40	Lateral / longitudinal	91	33	P6633
12"	300	Sch10 / Sch40	Lateral / longitudinal	91	33	P6634

Note: As FM rule, brace pipe is available with NPS Sch40 pipe 1", 1-1/4", 1-1/2", or 2", or other pipes as FM specific specification.