


Breeching inlet

Breeching inlet (Inlet breeching) is normally located on the ground floor of building to enable the fire and rescue service to connect hoses to supply water into dry riser, so that water can be pumped up to higher floors.



- Certificate: BSI / LPCB Approved
- Standard: BS 5041-3
- Connection: Flanged to EN 1092-2
- Temperature: 0°C to 38°C
- Test pressure: 30 bar
- Surface: Red powder coating (RAL 3000)

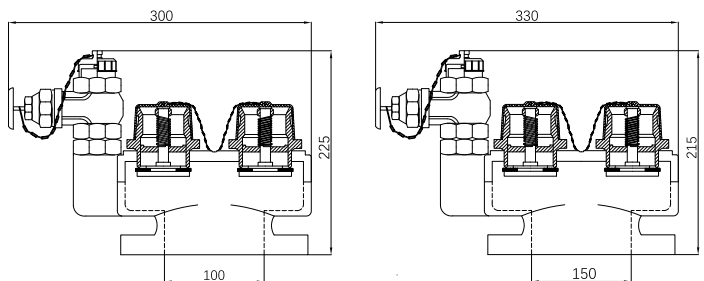

Main parts and material

Body	Spheroidal graphite iron (Ductile iron) as BS 2789	Inlet connection for hose	Copper alloy to BS 1400, with non-return valve
Drain valve	Copper alloy to BS 1400, design to BS 5154	Blank cap	Plastic or rubber, with chain

Available size

Way of inlet	Inlet	Outlet	Drain valve outlet	Working pressure (bar)	Ref. No.
2-way	(2) 2.5" BS336	Flanged DN 100	1", male BSPT	20	FE0601
4-way	(4) 2.5" BS336	Flanged DN 150	1", male BSPT	20	FE0602