


Ball lock stainless steel cable ties

Ball lock stainless steel cable ties are made from high-grade 304 or 316 stainless steel for exceptional corrosion resistance. They feature a reliable ball-lock mechanism that ensures a permanent, vibration-proof hold without loosening over time. Combining quick installation with high tensile strength, they are ideal for securing cables and wires, and deliver superior resistance to extreme temperatures, chemicals, UV radiation, and harsh weather conditions.



- Certificate: UL Listed
- Standard: UL 62275, NFPA 70
- Material: SS304 / SS316, without or with an epoxy coating
- Feature: Type 2, resistant to UV light
- Temperature: 300°C / 150°C
- Surface: Mill finish (entirely metallic) / epoxy coated

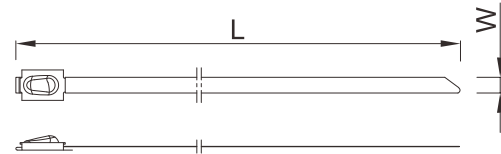

Available size (Mill finish SS304 / SS316)

Material	Thickness (mm)	Width (W, mm)	Length (L, mm)	Bundle diameter (mm)	Loop tensile strength (N)	Ref. No.
SS304 / SS316	0.25	4.6	100	13 ~ 21	1000	C0801 (UL)
SS304 / SS316	0.25	4.6	150	13 ~ 37	1000	C0802 (UL)
SS304 / SS316	0.25	4.6	200	13 ~ 50	1000	C0803 (UL)
SS304 / SS316	0.25	4.6	250	13 ~ 63	1000	C0804 (UL)
SS304 / SS316	0.25	4.6	300	13 ~ 76	1000	C0805 (UL)
SS304 / SS316	0.25	4.6	350	13 ~ 89	1000	C0806 (UL)
SS304 / SS316	0.25	4.6	400	13 ~ 102	1000	C0807 (UL)
SS304 / SS316	0.25	4.6	450	13 ~ 115	1000	C0808 (UL)
SS304 / SS316	0.25	4.6	500	13 ~ 128	1000	C0809 (UL)
SS304 / SS316	0.25	4.6	600	13 ~ 154	1000	C0810 (UL)
SS304 / SS316	0.25	7.9	150	13 ~ 37	1500	C0811 (UL)
SS304 / SS316	0.25	7.9	200	13 ~ 50	1500	C0812 (UL)

Ball lock stainless steel cable ties

Available size (Mill finish SS304 / SS316)

Material	Thickness (mm)	Width (W, mm)	Length (L, mm)	Bundle diameter (mm)	Loop tensile strength (N)	Ref. No.
SS304 / SS316	0.25	7.9	250	13 ~ 63	1500	C0813 (UL)
SS304 / SS316	0.25	7.9	300	13 ~ 76	1500	C0814 (UL)
SS304 / SS316	0.25	7.9	350	13 ~ 89	1500	C0815 (UL)
SS304 / SS316	0.25	7.9	400	13 ~ 102	1500	C0816 (UL)
SS304 / SS316	0.25	7.9	450	13 ~ 115	1500	C0817 (UL)
SS304 / SS316	0.25	7.9	500	13 ~ 128	1500	C0818 (UL)
SS304 / SS316	0.25	7.9	550	13 ~ 141	1500	C0819 (UL)
SS304 / SS316	0.25	7.9	600	13 ~ 154	1500	C0820 (UL)
SS304 / SS316	0.25	7.9	650	13 ~ 167	1500	C0821 (UL)
SS304 / SS316	0.25	7.9	700	13 ~ 180	1500	C0822 (UL)
SS304 / SS316	0.25	7.9	800	13 ~ 193	1500	C0823 (UL)
SS304 / SS316	0.36	12.7	350	25 ~ 89	3115	C0824 (UL)
SS304 / SS316	0.36	12.7	400	25 ~ 102	3115	C0825 (UL)
SS304 / SS316	0.36	12.7	500	25 ~ 128	3115	C0826 (UL)
SS304 / SS316	0.36	12.7	600	25 ~ 154	3115	C0827 (UL)
SS304 / SS316	0.36	12.7	700	25 ~ 180	3115	C0828 (UL)
SS304 / SS316	0.36	12.7	800	25 ~ 193	3115	C0829 (UL)

Available size (Epoxy coated SS304 / SS316)

Material	Thickness (mm)	Width (W, mm)	Length (L, mm)	Bundle diameter (mm)	Loop tensile strength (N)	Ref. No.
SS304 / SS316	0.40	4.6	100	13 ~ 21	700	C0851 (UL)
SS304 / SS316	0.40	4.6	150	13 ~ 37	700	C0852 (UL)
SS304 / SS316	0.40	4.6	200	13 ~ 50	700	C0853 (UL)
SS304 / SS316	0.40	4.6	250	13 ~ 63	700	C0854 (UL)
SS304 / SS316	0.40	4.6	300	13 ~ 76	700	C0855 (UL)
SS304 / SS316	0.40	4.6	350	13 ~ 89	700	C0856 (UL)
SS304 / SS316	0.40	4.6	400	13 ~ 102	700	C0857 (UL)
SS304 / SS316	0.40	4.6	450	13 ~ 115	700	C0858 (UL)

Ball lock stainless steel cable ties

Available size (Epoxy coated SS304 / SS316)

Material	Thickness (mm)	Width (W, mm)	Length (L, mm)	Bundle diameter (mm)	Loop tensile strength (N)	Ref. No.
SS304 / SS316	0.40	4.6	500	13 ~ 128	700	C0859 (UL)
SS304 / SS316	0.40	4.6	600	13 ~ 154	700	C0860 (UL)
SS304 / SS316	0.40	7.9	150	13 ~ 37	1000	C0861 (UL)
SS304 / SS316	0.40	7.9	200	13 ~ 50	1000	C0862 (UL)
SS304 / SS316	0.40	7.9	250	13 ~ 63	1000	C0863 (UL)
SS304 / SS316	0.40	7.9	300	13 ~ 76	1000	C0864 (UL)
SS304 / SS316	0.40	7.9	350	13 ~ 89	1000	C0865 (UL)
SS304 / SS316	0.40	7.9	400	13 ~ 102	1000	C0866 (UL)
SS304 / SS316	0.40	7.9	450	13 ~ 115	1000	C0867 (UL)
SS304 / SS316	0.40	7.9	500	13 ~ 128	1000	C0868 (UL)
SS304 / SS316	0.40	7.9	550	13 ~ 141	1000	C0869 (UL)
SS304 / SS316	0.40	7.9	600	13 ~ 154	1000	C0870 (UL)
SS304 / SS316	0.40	7.9	650	13 ~ 167	1000	C0871 (UL)
SS304 / SS316	0.40	7.9	700	13 ~ 180	1000	C0872 (UL)
SS304 / SS316	0.40	7.9	800	13 ~ 193	1000	C0873 (UL)
SS304 / SS316	0.40	12.0	350	25 ~ 89	1200	C0874 (ISO)
SS304 / SS316	0.40	12.0	400	25 ~ 102	1200	C0875 (ISO)
SS304 / SS316	0.40	12.0	500	25 ~ 128	1200	C0876 (ISO)
SS304 / SS316	0.40	12.0	600	25 ~ 154	1200	C0877 (ISO)
SS304 / SS316	0.40	12.0	700	25 ~ 180	1200	C0878 (ISO)
SS304 / SS316	0.40	12.0	800	25 ~ 193	1200	C0879 (ISO)