


Barb lock nylon cable ties

Barb lock nylon cable ties are made from durable Nylon 66 and feature an embedded stainless steel barb locking mechanism. They deliver exceptional corrosion resistance, a vibration-proof secure hold, and infinite adjustability across the full bundle range for precise tensioning. Combining quick, low-thread-force installation with high tensile strength, they are ideal for securing cables or wires for industrial, construction, and general bundling tasks.



- Certificate: UL Listed
- Standard: UL 62275, NFPA 70
- Material: Nylon 66, with SS304 barb
- Feature: Type 21, resistant to UV light
- Fire rating: UL 94 V-0, self-extinguishing
- Temperature: -40°C ~ 85°C
- Color: Black, nature white, or customized

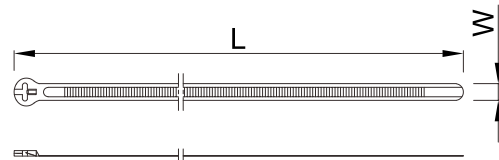

Available size

Material	Thickness (mm)	Width (W,mm)	Length (L, mm)	Bundle diameter (mm)	Loop tensile strength (N)	Ref. No.
Nylon 66	0.9	2.4	102	2 ~ 23	80	C0901 (UL)
Nylon 66	1.2	2.4	160	2 ~ 41	80	C0902 (UL)
Nylon 66	1.2	2.4	201	2 ~ 51	80	C0903 (UL)
Nylon 66	1.1	3.6	155	3 ~ 35	178	C0904 (UL)
Nylon 66	1.1	3.6	203	3 ~ 51	178	C0905 (UL)
Nylon 66	1.3	3.6	287	3 ~ 76	178	C0906 (UL)
Nylon 66	1.3	3.6	368	3 ~ 102	178	C0907 (UL)
Nylon 66	1.2	4.8	186	4 ~ 45	222	C0908 (UL)
Nylon 66	1.2	4.8	203	4 ~ 51	222	C0909 (UL)
Nylon 66	1.3	4.8	250	4 ~ 65	222	C0910 (UL)
Nylon 66	1.3	4.8	305	4 ~ 83	222	C0911 (UL)
Nylon 66	1.3	4.8	361	4 ~ 100	222	C0912 (UL)

Barb lock nylon cable ties

Available size

Material	Thickness (mm)	Width (W,mm)	Length (L, mm)	Bundle diameter (mm)	Loop tensile strength (N)	Ref. No.
Nylon 66	1.5	4.8	376	4 ~ 104	222	C0913 (UL)
Nylon 66	1.7	7.0	221	6 ~ 51	534	C0914 (UL)
Nylon 66	1.7	7.0	300	6 ~ 80	534	C0915 (UL)
Nylon 66	1.7	7.0	378	6 ~ 102	534	C0916 (UL)
Nylon 66	1.7	7.0	538	6 ~ 152	534	C0917 (UL)
Nylon 66	1.7	7.0	620	6 ~ 178	534	C0918 (UL)
Nylon 66	1.7	7.0	699	6 ~ 203	534	C0919 (UL)
Nylon 66	1.7	7.0	780	6 ~ 228	534	C0920 (UL)