


Metric oval neck track head bolt




- Standard: DIN 5903-1, ISO 6182-12
- Material: CS per ISO 898-1 Class 8.8, SS per ISO 3506-1 A2-70 or A4-70
- Thread: Coarse thread, 6g per ISO 965-1
- Surface: Zinc electroplated, hot-dip galvanized, dacromet, mill finish, etc.

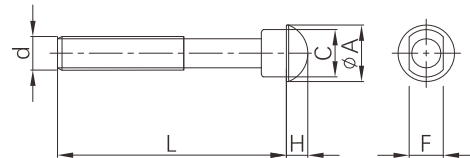


Available size

Size	A	C	F	H	L	Bolt torque (N.m)	Ref. No.
	mm	mm	mm	mm	mm		
M10	18.5	13.5	9.5	5.0	50 ~ 90	40 ~ 60	G9201 (ISO)
M12	23.5	17.5	12.3	8.0	70 ~ 110	110 ~ 135	G9202 (ISO)
M16	29.5	20.5	15.7	10.0	80 ~ 120	135 ~ 175	G9203 (ISO)
M20	38.0	27.0	18.3	12.5	90 ~ 130	175 ~ 245	G9204 (ISO)
M22	42.2	31.0	21.4	14.0	100 ~ 150	245 ~ 325	G9205 (ISO)

Metric heavy hexagon nut

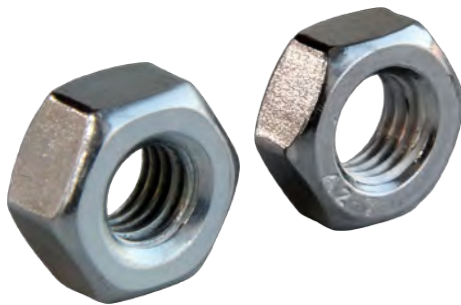

- Standard: ISO 4032, ISO 6182-12
- Material: CS per ISO 898-2 Class 8, SS per ISO 3506-2 A2-70 or A4-70
- Thread: Coarse thread, 6H per ISO 965-1
- Surface: Zinc electroplated, hot-dip galvanized, dacromet, mill finish, etc.



Available size

Size	F (mm)		G (mm)	H (mm)		Ref. No.
	Min	Max	Min	Min	Max	
M10	15.73	16.00	17.77	8.04	8.40	G9301 (ISO)
M12	17.73	18.00	20.03	10.37	10.80	G9302 (ISO)
M16	23.67	24.00	26.75	14.10	14.80	G9303 (ISO)
M20	29.16	30.00	32.95	16.90	18.00	G9304 (ISO)
M22	33.00	34.00	37.29	18.10	19.40	G9305 (ISO)