


ANSI oval neck track head bolt




- Standard: ASME B18.10, AWWA C606
- Material: CS per ASTM 183 or A449, SS per ASTM F593 or A193
- Thread: UNC, Class 2A per ANSI B1.1
- Surface: Zinc electroplated, hot-dip galvanized, dacromet, mill finish, etc.

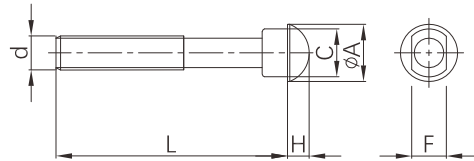


Available size

Size	A	C	F	H	L	Bolt torque (lb-ft)	Ref. No.
	mm	mm	mm	mm	mm		
3/8"	19.0	13.9	9.5	6.0	50 ~ 90	30 ~ 50	G9401 (ISO)
1/2"	22.5	16.0	12.7	8.0	70 ~ 110	80 ~ 100	G9402 (ISO)
5/8"	27.4	19.8	15.9	10.0	80 ~ 120	100 ~ 130	G9403 (ISO)
3/4"	32.5	26.2	19.1	12.0	90 ~ 130	130 ~ 180	G9404 (ISO)
7/8"	37.7	28.8	22.2	14.0	100 ~ 150	180 ~ 240	G9405 (ISO)

ANSI heavy hexagon nut

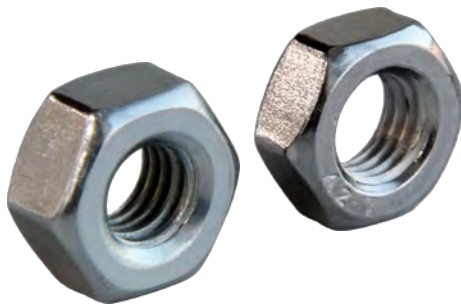

- Standard: ASME B18.10, AWWA C606
- Material: CS per ASTM A563, SS per ASTM F594 or ASTM A194
- Thread: UNC, Class 2B per ANSI B1.1
- Surface: Zinc electroplated, hot-dip galvanized, dacromet, mill finish, etc.



Available size

Size	F (mm)		G (mm)		H (mm)		Ref. No.
	Min	Max	Min	Max	Min	Max	
3/8"	15.73	17.47	17.77	20.17	8.66	9.57	G9501 (ISO)
1/2"	17.73	22.22	20.03	25.65	11.78	12.80	G9502 (ISO)
5/8"	23.67	26.97	26.75	31.16	14.90	16.02	G9503 (ISO)
3/4"	29.16	31.75	32.95	36.65	18.03	19.25	G9504 (ISO)
7/8"	33.00	36.53	37.29	42.16	21.16	22.48	G9505 (ISO)