



Hexagon flange nut

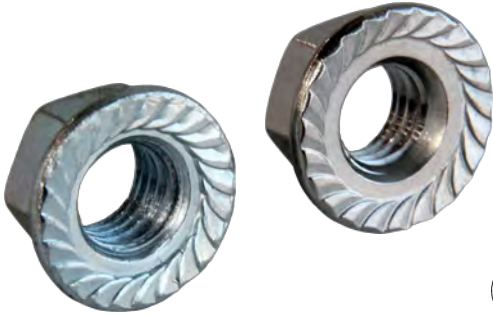

- Standard: ISO 4161, DIN 6923
- Material: CS per ISO 898-2 Class 8, SS per ISO 3506-2 A2-70 or A4-70
- Thread: Coarse thread, 6H per ISO 965-1
- Surface: Zinc electroplated, hot-dip galvanized, dacromet, mill finish, etc.




Available size

Size	F (mm)		D (mm)	H (mm)		Ref. No.
	Min	Max	Max	Min	Max	
M10	14.73	15.00	21.8	9.64	10.00	G9601 (ISO)
M12	17.73	18.00	26.0	11.57	12.00	G9602 (ISO)
M16	23.67	24.00	34.5	15.30	16.00	G9603 (ISO)
M20	29.16	30.00	42.8	18.70	20.00	G9604 (ISO)

U-bolt for mechanical tee



- Standard: Refer to ISO 6182-12
- Material: CS per ISO 898-1 Class 8.8, SS per ISO 3506-1 A2-70 or A4-70
- Thread: Coarse thread, 6g per ISO 965-1
- Includes: Complete set, U-bolt + 2 hexagon flange nuts
- Surface: Zinc electroplated, hot-dip galvanized, dacromet, mill finish, etc.



Available size

Size	Compatible steel pipe			L (mm)	Ref. No.
	Inch	DN	mm		
M10	Pipe 1" ~ 2-1/2"	25 ~ 65	33.4 ~ 76.1	30 ~ 50	G9701 (ISO)
M12	Pipe 3" ~ 4"	80 ~ 100	88.9 ~ 114.3	50 ~ 80	G9702 (ISO)
M16	Pipe 6"	150	165.1 / 168.3	105	G9703 (ISO)