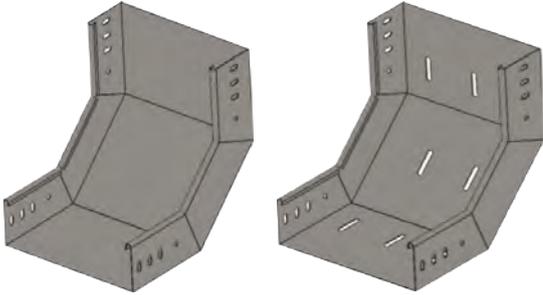# Inside 90° vertical elbow

- · Certificate: ISO
- · Standard: NEMA VE 1, NFPA 70
- · Material: Carbon steel / stainless steel
- · Thickness: Standard 1.0 mm, available 1.2 ~ 2.0 mm
- · Feature: Vertical, different bend radius
- · Surface: Hot-dip galvanized, pre-galvanized / mill finish, polished

Available size

Size	Material	Bottom	Width (mm)	Height (mm)	Bend radius (mm)	Ref. No.
50 x 50	CS / SS	Solid / ventilated	50	50	100	C8601 (ISO)
75 x 50	CS / SS	Solid / ventilated	75	50	150	C8602 (ISO)
75 x 75	CS / SS	Solid / ventilated	75	75	150	C8603 (ISO)
100 x 50	CS / SS	Solid / ventilated	100	50	150	C8604 (ISO)
100 x 75	CS / SS	Solid / ventilated	100	75	150	C8605 (ISO)
100 x 100	CS / SS	Solid / ventilated	100	100	150	C8606 (ISO)
150 x 50	CS / SS	Solid / ventilated	150	50	150	C8607 (ISO)
150 x 75	CS / SS	Solid / ventilated	150	75	150	C8608 (ISO)
150 x 100	CS / SS	Solid / ventilated	150	100	150	C8609 (ISO)
150 x 150	CS / SS	Solid / ventilated	150	150	150	C8610 (ISO)
200 x 50	CS / SS	Solid / ventilated	200	50	150	C8611 (ISO)
200 x 75	CS / SS	Solid / ventilated	200	75	150	C8612 (ISO)
200 x 100	CS / SS	Solid / ventilated	200	100	150	C8613 (ISO)
200 x 150	CS / SS	Solid / ventilated	200	150	150	C8614 (ISO)
200 x 200	CS / SS	Solid / ventilated	200	200	150	C8615 (ISO)
300 x 50	CS / SS	Solid / ventilated	300	50	150	C8616 (ISO)
300 x 75	CS / SS	Solid / ventilated	300	75	150	C8617 (ISO)
300 x 100	CS / SS	Solid / ventilated	300	100	150	C8618 (ISO)
300 x 150	CS / SS	Solid / ventilated	300	150	150	C8619 (ISO)
300 x 200	CS / SS	Solid / ventilated	300	200	150	C8620 (ISO)
400 x 50	CS / SS	Solid / ventilated	400	50	150 / 300	C8621 (ISO)

C86

Inside 90° vertical elbow

Available size

Size	Material	Bottom	Width (mm)	Height (mm)	Bend radius (mm)	Ref. No.
400 x 75	CS / SS	Solid / ventilated	400	75	150 / 300	C8622 (ISO)
400 x 100	CS / SS	Solid / ventilated	400	100	150 / 300	C8623 (ISO)
400 x 150	CS / SS	Solid / ventilated	400	150	150 / 300	C8624 (ISO)
400 x 200	CS / SS	Solid / ventilated	400	200	150 / 300	C8625 (ISO)
500 x 50	CS / SS	Solid / ventilated	500	50	150 / 300	C8626 (ISO)
500 x 75	CS / SS	Solid / ventilated	500	75	150 / 300	C8627 (ISO)
500 x 100	CS / SS	Solid / ventilated	500	100	150 / 300	C8628 (ISO)
500 x 150	CS / SS	Solid / ventilated	500	150	150 / 300	C8629 (ISO)
500 x 200	CS / SS	Solid / ventilated	500	200	150 / 300	C8630 (ISO)
600 x 50	CS / SS	Solid / ventilated	600	50	150 / 300 / 600	C8631 (ISO)
600 x 75	CS / SS	Solid / ventilated	600	75	150 / 300 / 600	C8632 (ISO)
600 x 100	CS / SS	Solid / ventilated	600	100	150 / 300 / 600	C8633 (ISO)
600 x 150	CS / SS	Solid / ventilated	600	150	150 / 300 / 600	C8634 (ISO)
600 x 200	CS / SS	Solid / ventilated	600	200	150 / 300 / 600	C8635 (ISO)