


## Horizontal reducer



- Certificate: ISO
- Standard: NEMA VE 1, NFPA 70
- Material: Carbon steel / stainless steel
- Thickness: Standard 1.0 mm, available 1.2 ~ 2.0 mm
- Feature: Horizontal, straight reducer / left reducer / right reducer
- Surface: Hot-dip galvanized, pre-galvanized / mill finish, polished

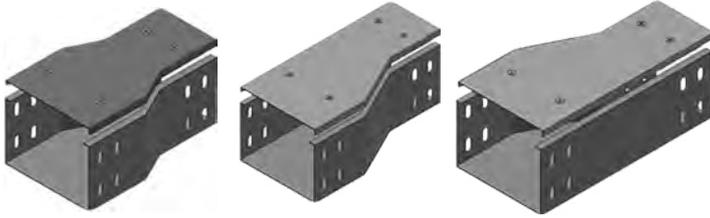

### Available size

Size	Material	Bottom	Type	Width 1 (mm)	Width 2 (mm)	Height (mm)	Ref. No.
75 x 50	CS / SS	Solid / ventilated	Straight / left / right	75	50	50	C8901 (ISO)
100 x 50	CS / SS	Solid / ventilated	Straight / left / right	100	50	50	C8902 (ISO)
100 x 75	CS / SS	Solid / ventilated	Straight / left / right	100	75	75	C8903 (ISO)
150 x 50	CS / SS	Solid / ventilated	Straight / left / right	150	50	50	C8904 (ISO)
150 x 75	CS / SS	Solid / ventilated	Straight / left / right	150	75	75	C8905 (ISO)
150 x 100	CS / SS	Solid / ventilated	Straight / left / right	150	100	100	C8906 (ISO)
200 x 75	CS / SS	Solid / ventilated	Straight / left / right	200	75	75	C8907 (ISO)
200 x 100	CS / SS	Solid / ventilated	Straight / left / right	200	100	100	C8908 (ISO)
200 x 150	CS / SS	Solid / ventilated	Straight / left / right	200	150	150	C8909 (ISO)
300 x 100	CS / SS	Solid / ventilated	Straight / left / right	300	100	100	C8910 (ISO)
300 x 150	CS / SS	Solid / ventilated	Straight / left / right	300	150	150	C8911 (ISO)
300 x 200	CS / SS	Solid / ventilated	Straight / left / right	300	200	200	C8912 (ISO)
400 x 100	CS / SS	Solid / ventilated	Straight / left / right	400	100	100	C8913 (ISO)
400 x 150	CS / SS	Solid / ventilated	Straight / left / right	400	150	150	C8914 (ISO)
400 x 200	CS / SS	Solid / ventilated	Straight / left / right	400	200	200	C8915 (ISO)
500 x 100	CS / SS	Solid / ventilated	Straight / left / right	500	100	100	C8916 (ISO)
500 x 150	CS / SS	Solid / ventilated	Straight / left / right	500	150	150	C8917 (ISO)
500 x 200	CS / SS	Solid / ventilated	Straight / left / right	500	200	200	C8918 (ISO)
600 x 100	CS / SS	Solid / ventilated	Straight / left / right	600	100	100	C8919 (ISO)
600 x 150	CS / SS	Solid / ventilated	Straight / left / right	600	150	150	C8920 (ISO)
600 x 200	CS / SS	Solid / ventilated	Straight / left / right	600	200	200	C8921 (ISO)