


Horizontal two compartment fire cabinet

Horizontal fire cabinet has dual compartment for protecting both hose reel and layflat fire hose (or extinguisher). The cabinet is surface or recessed mounted in a wall, with compact design for saving space and easy access for operation.



- Certificate: ISO
- Standard: Refer to BS 5041
- Capacity: Fire hose reel + extinguisher
- Mounting: Layflat hose with branchpipe
- Surface: Wall surface / recessed
- Surface: Red powder coating / bright SS

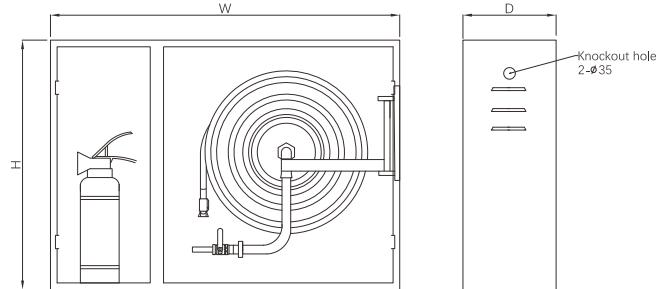

Main parts and material

| | | | |
|---------------------|---|------------------|---|
| Box / door | Cold rolled steel or SS, 1.0 / 1.2 / 1.5 mm thickness | Door type | Double doors, from left and right open 180°, bullet hinge or continuous piano hinge |
| Door glazing | Non (full solid), or acrylic viewing panel, slotted inside the door or embedded into the door with rubber raised edge | Lock | Rotary pull lock, or keyed cylinder lock |

Available size

| Content | Capacity | Mounting | Dimension W x H x D (mm) | Ref. No. |
|--|-----------------------|--------------------|--------------------------|----------|
| Swinging arm hose reel + dry powder extinguisher | 19mm x 30m + 1 x 6 kg | Surface / recessed | 1050 x 800 x 250 | FE9601 |
| Swinging arm hose reel + dry powder extinguisher | 25mm x 30m + 1 x 6 kg | Surface / recessed | 1050 x 800 x 270 | FE9602 |
| Layflat hose with branchpipe | 2.5" x 30m, 2 sets | Surface / recessed | 1163 x 560 x 300 | FE9603 |

Note:

1. For recessed type, it contains projection trim on the external face of cabinet with width 38mm.
2. Cabinet can be LPCB & CE approved if it contains LPCB & CE approved fire hose reel.

FE96