


Addressable manual call point (NFPA 72)

Addressable manual call point incorporates a resettable non-breakable glass in the front face for simple and safe use. It is designed to send alarm signal to control panel when it is pressed manually.

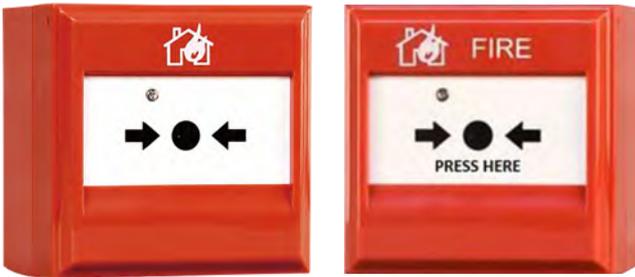

- Certificate: UL Listed
- Standard: UL 38, NFPA 72, NFPA 70
- Feature: Addressable, LED indicator, special key to reset
- Material: ABS cover, red and white
- Temperature: -10°C to 50°C
- Humidity: 0% to 95%, non-condensing
- Installation: Surface or recessed mounting

Available size

Operating voltage	Standby current	Alarm current	Manual activation	FIRE marking	Dimension W x H x D (mm)	Ref. No.
24 VDC	≤ 0.6 mA	≤ 1.8 mA	Press, single action	/	87 x 87 x 59	A1501 (UL)
24 VDC	≤ 0.6 mA	≤ 1.8 mA	Press, single action	Yes	87 x 87 x 59	A1502 (UL)

Addressable manual pull station (NFPA 72)

Addressable manual pull station provides manual fire alarm activation. It is manually operated through a dual-action process: pushing the push bar and then pulling down the pull handle, to transmit alarm signal to the control panel.



- Certificate: UL Listed / FM Approved
- Standard: UL 38, NFPA 72, NFPA 70
- Feature: Addressable, LED indicator, special key to reset
- Material: Polycarbonate resin, red
- Temperature: 0°C to 49°C
- Humidity: 0% to 95%, non-condensing
- Installation: Surface or recessed mounting

Available size (Source 1 with UL/FM)

Operating voltage	Standby current	Alarm current	Manual activation	Stage	Dimension W x H x D	Ref. No.
24 VDC	2.0 mA	≤ 3.3 mA	Push-pull, dual action	1	105 x 132 x 35	A1611 (UL/FM)