

Addressable manual call point (EN 54)

Addressable manual call point incorporates a resettable non-breakable glass in the front face for simple and safe use. It is designed to send alarm signal to control panel when it is pressed manually.



- Certificate: LPCB approved
- Standard: EN 54-11
- Feature: Addressable, LED indicator, special key to reset
- Material: ABS cover, red and white
- Temperature: -10°C to 50°C
- Humidity: 0% to 95%, non-condensing
- Installation: Surface or recessed mounting


Available size

Operating voltage	Standby current	Alarm current	Manual activation	Dimension W x H x D (mm)	Ref. No.
24 VDC	0.6 mA	1.8 mA	Press, single action	89 x 93 x 35	AE1501 (LPCB)

Note: For surface mounting, a backbox is needed for easy installation, see AE3801.

Protective flip cover for manual call point (EN 54)

Protective flip cover for manual call point is a simple device as optional accessory. It is used to avoid pressing manual call point accidentally.

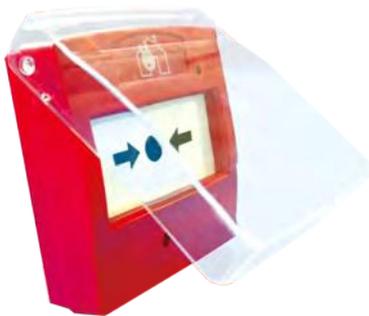

- Certificate: ISO
- Standard: Refer to EN 54-11
- Feature: Protect manual call point
- Material: ABS, transparent
- Temperature: -10°C to 50°C

Available size

Application	Overall dimension W x H x D (mm)	Ref. No.
Simply install, for protecting manual call point	94 x 98 x 21	AE1511 (ISO)