


Self-contained waterproof non-maintained bulkhead emergency light

Self-contained waterproof non-maintained bulkhead emergency light provides reliable illumination during power outages. This classic surface-mounted fixture is suitable for ceiling or wall installation, both indoors and outdoors. It automatically switches to emergency mode upon detecting a main power failure.



- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors and outdoors, IP65

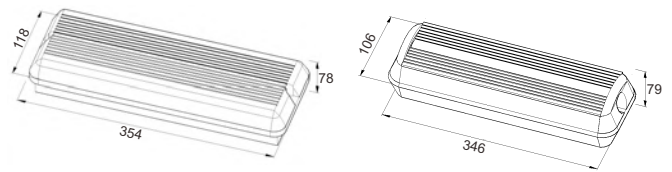

Main parts and material

Enclosure	Fire retardant ABS base (UL 94 5VA rated), optically clear PC diffuser	Lamp	LED array, 20 x SMD 2835, cool white
Backup power	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	Networking	/
Accessories	Universal mounting bracket (fits standard junction boxes)	Others	Manual test button, status indicator

Available size

Type	Main power	Backup power	Duration	Luminous flux	Dimension W x H x D (mm)	Ref. No.
Self-contained waterproof non-maintained bulkhead	100 ~ 240 VAC, 50/60 Hz, consumption 3 W	Ni-Cd, 3.6 V, 2000 mAh	3 hours	200 lm	354 x 118 x 78	CL0101 (UL)
Self-contained waterproof non-maintained bulkhead	220 ~ 240 VAC, 50/60 Hz, consumption 3.5 W	Ni-Cd, 3.6 V, 2000 mAh	3 hours	250 lm	346 x 106 x 79	CL0102 (UL)