

## Self-contained waterproof maintained bulkhead emergency light


Self-contained waterproof maintained bulkhead emergency light ensures continuous illumination regardless of the mains power supply status. This classic surface-mounted fixture is suitable for ceiling or wall installation, both indoors and outdoors. It automatically switches to emergency mode upon detecting a main power failure.



- Certificate: UL Listed
- Standard: UL 924, NFPA 70, NFPA 101, IBC
- Feature: High brightness, self-contained
- Temperature: -5°C to 45°C
- Installation: Ceiling or wall, surface mounting
- Location: Indoors and outdoors, IP65



Optional pictogram

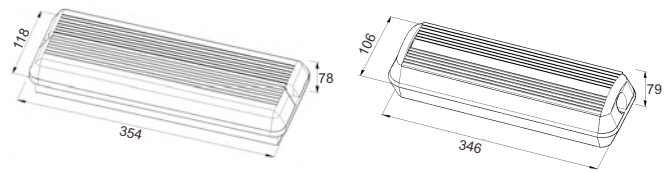

### Main parts and material

<b>Enclosure</b>	Fire retardant ABS base (UL 94 5VA rated), optically clear PC diffuser	<b>Lamp</b>	LED array, 20 x SMD 2835, cool white
<b>Backup power</b>	Built-in rechargeable battery, 24 hours charge time, overcharge and over-discharge protection	<b>Networking</b>	/
<b>Accessories</b>	Universal mounting bracket (fits standard junction boxes), adhesive directional label	<b>Others</b>	Manual test button, status indicator

### Available size

Type	Main power	Backup power	Duration	Luminous flux	Dimension W x H x D (mm)	Ref. No.
Self-contained waterproof maintained bulkhead	100 ~ 240 VAC, 50/60 Hz, consumption 5.5 W	Ni-Cd, 3.6 V, 2000 mAh	3 hours	200 lm	354 x 118 x 78	CL0401 (UL)
Self-contained waterproof maintained bulkhead	100 ~ 240 VAC, 50/60 Hz, consumption 5.5 W	Ni-Cd, 3.6 V, 2000 mAh	3 hours	270 lm	346 x 106 x 79	CL0402 (UL)